


# NANO-7270

EPIC Intel Pentium M / Celeron M CPU with LCD/CRT VGA, LAN, Audio



**Coming Soon**

**Long Term Supports**

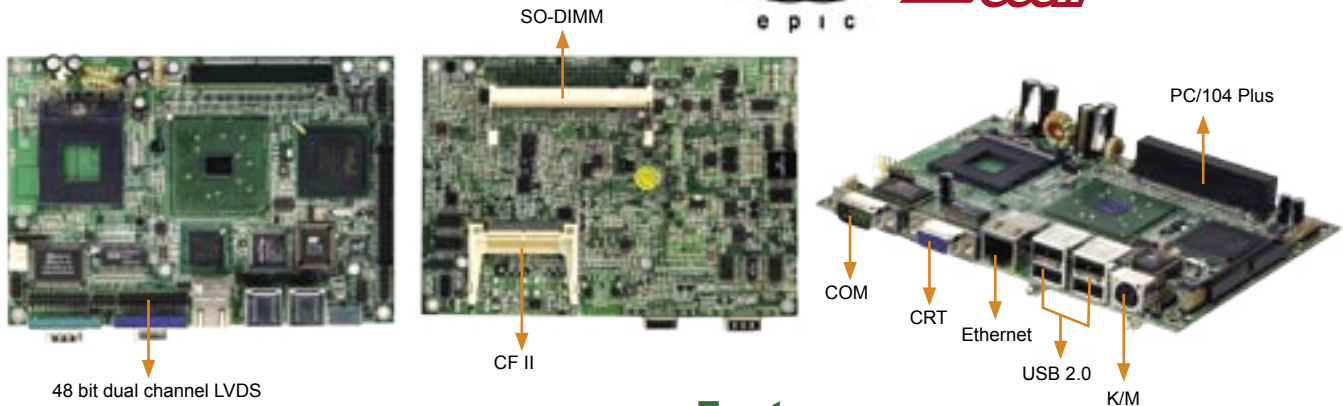

## Specifications

|                               |   |
|-------------------------------|---|
| <b>CPU</b>                    | Socket 479 base support Intel Pentium M CPU up to 400MHz FSB (NANO-7270G)<br>On board ULV Intel Celeron M 600MHz with 512KB L2 Cache (NANO-7270-600)  |
| <b>System Chipset</b>         | Intel 852GM + ICH4  |
| <b>System Memory</b>          | 1x DDR200/266 SO-DIMM support up to 1GB   |
| <b>Display</b>                | Display controller<br>Intel GMCH Integrated Graphics controller<br>Integrated AGP 4X 2D/3D engine<br>One VGA port for CRT monitor 1600X1200@8bpp;<br>1280X1024@16bpp<br>48-bit LVDS port<br>Dual independent displays<br>Shared system memory up to 32MB (DVMT) |
| <b>Ethernet</b>               | Intel 82541ER for 10/100/1000Mbps Ethernet or Intel 82551ER for 10/100Mbps Ethernet   |
| <b>SSD</b>                    | 1x Compact Flash™ Type II Socket  |
| <b>I/O</b>                    | 1 x IDE port<br>1 x Parallel port<br>1 x PS2 Keyboard/Mouse support<br>3 x RS-232 Serial port<br>1 x RS-232/422/485 port<br>2 x SATA port<br>6 x USB 2.0 port (4 by connector)<br>1 x PS/2 for Keyboard/Mouse<br>1 x IrDA by pin header (SIR mode)              |
| <b>Audio</b>                  | AC'97 CODEC   |
| <b>Digital I/O</b>            | 4 inputs / 4 outputs  |
| <b>WDT</b>                    | Software programmable support 1 ~ 255 sec system reset  |
| <b>Expansion slot</b>         | 1x PC/104+ (PCI interface)  |
| <b>Hardware Monitoring</b>    | CPU voltage / Temperature / FAN speed monitor   |
| <b>Power control function</b> | Meets ACPI 1.1 specification<br>Single voltage +12V only  |
| <b>Operation Temperature</b>  | 0 ~ 60 °C   |
| <b>Relative Humidity</b>      | 5 ~95%, non-condensing  |

## Ordering Information

### ● NANO-7270G-R10

EPIC Socket 479 Intel Pentium M 533MHz FSB with LCD/CRT VGA, GbE, USB2.0, Audio

### ● NANO-7270-600-R10

EPIC on board ULV Intel Celeron M CPU with LCD/CRT VGA, LAN, USB2.0, Audio

## Feature

- Intel Pentium M / Celeron M CPU support up to FSB 400MHz
- CRT/LCD VGA integrated in i852GM, support 48-bit LVDS for independent dual display
- 1x DDR200/266 SO-DIMM support up to 1GB
- Support PC/104+(PCI only) extension slot

## Tech Talk

### Intel® 852 Chipset Dual-Display Feature Introduction

Intel® 852 chipsets are integrated with high performance 2D/3D graphic engine called Intel® Extreme Graphics 2. Intel® 852 has two independent display pipelines which allow for users to operate the system with up to two displays driven by the integrated graphics device. The displays can be driven in a few different configurations, which are detailed in the following sections.

#### 1. Independent Mode

This mode is used to drive multiple displays with the different content. Each display device can be configured independently, allowing each to have a different refresh rates for optimum display on each device. Independent mode is beneficial when using displays of various types, such as one pipe driving a Digital display while the other drives an analog overhead projector that may only support specific refresh rates.

#### 2. Mirror Mode

This mode is driven by a single pipe, which only allows same content, color depth, resolution, and refresh rate.

## Dimensions

