

PPC-5150 PPC-5170

15" TFT LCD P4 Panel PC

17" TFT LCD P4 Panel PC

Pentium® 4 Panel PC System- Available



PPC-5150 (383.6mm)
PPC-5170 (421.5mm)



Accept One half size PCI-add-on card



Analog VGA Input



POS-478


Socket-478 Base Full Function
POS Board With LCD/CRT VGA,
LAN,GbE, USB2.0, 1394, Audio

Pentium® 4
FSB 533 Panel PC

Protected
against dust
(no harmful
deposit)




Protected
against jets
of water from
all directions




Front Panel meets IP65 standard

Dimensions:PPC-5170-R2

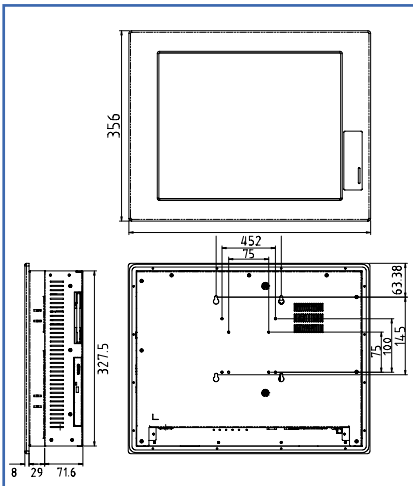

Dimensions:PPC-5150-R2

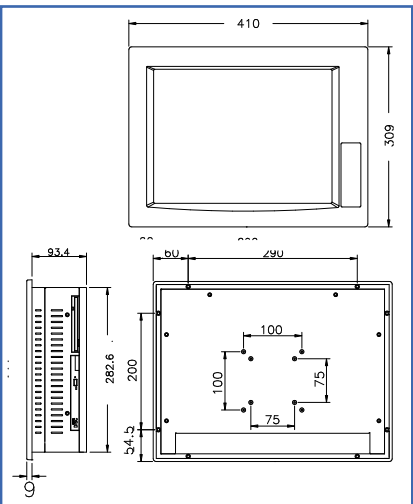

SPECIFICATIONS

- ◆ CPU: Socket-478 base support Intel® Pentium® 4 / Celeron up to 533 MHz FSB
- ◆ Aluminum front panel meets IP65 standard
- ◆ High brightness TFT LCD
 - Resolution: 1024 x 768 (PPC-5150-R2), 1280 x 1024(PPC-5170-R2)
 - Brightness: 250 cd/m² (PPC-5150-R2), 260 cd/m² (PPC-5170-R2)
 - LCD MTBF: 50,000 hours
 - Backlight MTBF: 25,000 hrs (PPC-5150-R2), 50,000 hrs (PPC-5170-R2)
- ◆ Drive Bays:1 x 3.5" Slim FDD , 1 x Slim CD-ROM , 2 x 2.5" HDD
- ◆ Accepts one half-size PCI add-on card
- ◆ Equipped with CPU cooling fan
- ◆ Standard Power Supply:
 - UPF200-AA 200W Industrial ATX with PFC Power Supply
 - (+5V@21A, +12A@10A, +3.3V@14A,-5V@0.3A,-12V@0.8A, +5V@2A)
- ◆ Operating temperature: 0~50°C
- ◆ Vibration: 5-17Hz, 0.1" double amplitude displacement
17~640 Hz, 1.5G acceleration peak to peak
- ◆ Shock: 10G acceleration peak to peak (11ms)
- ◆ Color: White (PANTONE 413C)
- ◆ Optional Resistive and Capacitive Touch Screen
- ◆ Dimension: 452mm(W)x 356mm(H)x 108.6mm(D) (PPC-5170-R2)
410mm(W)x 309mm(H)x 102.4mm(D) (PPC-5150-R2)
- ◆ Net/GW: 8/12(kg)(PPC-5150-R2), 10/14(kg)(PPC-5170-R2)

ORDERING INFORMATION

Model	SBC	Touch Screen
PPC-5170W-AL-R2	POS-478	T-R170B, T-C170B
PPC-5150W-AL-R2		T-R151B, T-C151

Optional: ARM-31 - Loading capacity from 7 to 14kgs
RK-150, RK-170: Rackmount kit

Note: For other colors of front panel and chassis, please contact supplier