


PPC-2710GS AMD® Geode LX800 Fanless Panel PC with 10.4" TFT LCD and Touch Screen

- 1 Single Board Computer
- 2 VIDEO CARD
- 3 Xscale Solutions
- 4 Open HMI
- 5 VITO Universal Controller
- 6 DINO BLADE
- 7 LCD Product Series
- 8 Embedded System
- 9 Industrial Computer Chassis
- 10 Power Supply
- 11 Peripherals

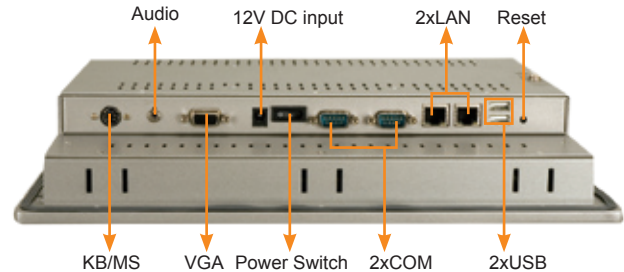


Features

1. 10.4" TFT LCD
2. AMD Geode™ LX-800 (500MHz) processor
3. DDR 333/400MHz SO-DIMM memory up to 1GB
4. Dual 10/100Mbps Ethernet
5. Fanless and ultra-low power consumption
6. Optional 802.11 b/g wireless LAN module
7. One Compact Flash Type II socket
8. IP 65 compliant aluminum front panel

AFLMB-LX800


1. AMD® LX800 processor embedded board with RoHS compliance
2. DDR 333/400MHz SO-DIMM SDRAM up to 1GB
3. Complete I/O support with IDE,CFII, dual LAN and 2xUSB2.0, 2xRS-232

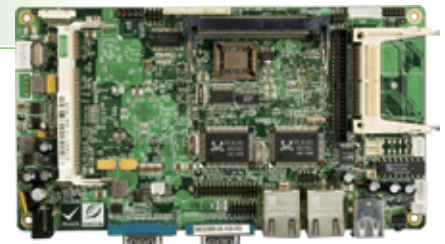

Specifications

CPU Board	AFLMB-LX800	Touch Screen	Optional 4-wire resistive type with RS-232 interface.
CPU	AMD® Geode LX800	Power Supply	- AC adapter - 45W, 63000-UP0451E12P81L-RS - Input: 90 ~ 240VAC @ 50/60Hz, Output: 12VDC
Chipset	AMD LX 800 + CS5536	Operating Temperature	0 °C~ 50°C.
Memory	1 x DDR 333/400MHz SO-DIMM socket up to 1GB	Storage Temperature	-20°C ~ 60°C.
VGA	AMD® Geode LX800	Vibration	- 5~17Hz 0.1" double amplitude displacement - 17~640 Hz 1.5G acceleration peak to peak
SSD	CF Type II	Shock	10G acceleration peak to peak. (11ms)
Drive Bay	- 1 x 2.5" IDE HDD bay	Relative Humidity	5 ~ 95% @ 60°C, non-condensing
Ethernet	Dual RTL8100C 10/100Mbps	Net / Gross Weight	2.6 / 5.5 Kg
Audio	AC '97 2.3 Realtek ALC 203	Dimensions	311.5(w) x 242(H) x 58(D)mm
I/O	- 2 x RS-232 ports - 2 x USB 2.0 ports - 1 x PS/2 ports (KB/MS) - 1 x VGA out - 2 x LAN - 1 x Audio (Line-out) - 1 x IDE	LCD	- Resolution : 800 x 600 VGA) - Brightness : 230 cd/m ² - Contrast Ratio : 500:1 - Viewing Angle (H-V):140/120 - Backlight MTBF : 30000hrs
		Front Panel Protection	IP 65 Compliant
Expansion	Mini PCI for 802.11 b/g wireless LAN module (optional)	Certificate	Meets CE / FCC


Dimensions

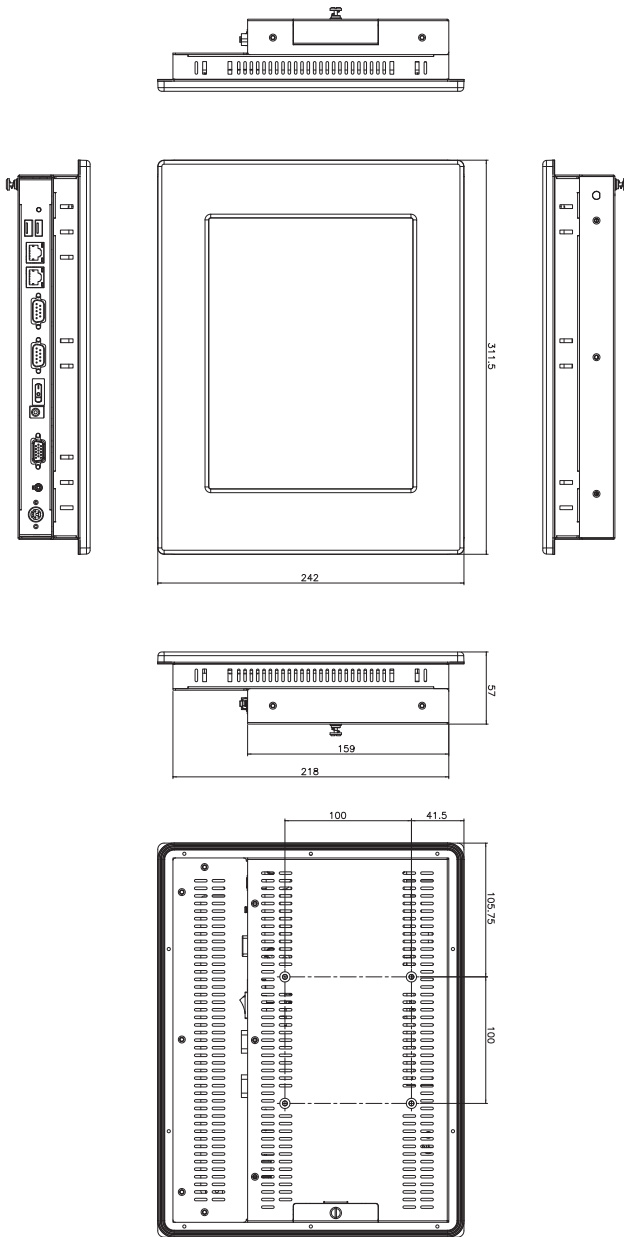


Optional 802.11 b/g wireless LAN module

The PPC-2710G and PPC-2712G equip with a wireless module that larger bundles of data can also be transmitted at high speed and in real-time. The application of wireless LAN facilitates its use in large warehouses and at greater distances.

Long distance communication

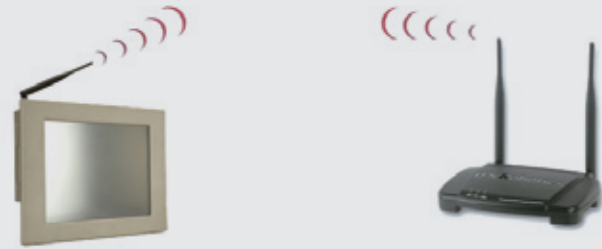

IQ mount supporting list

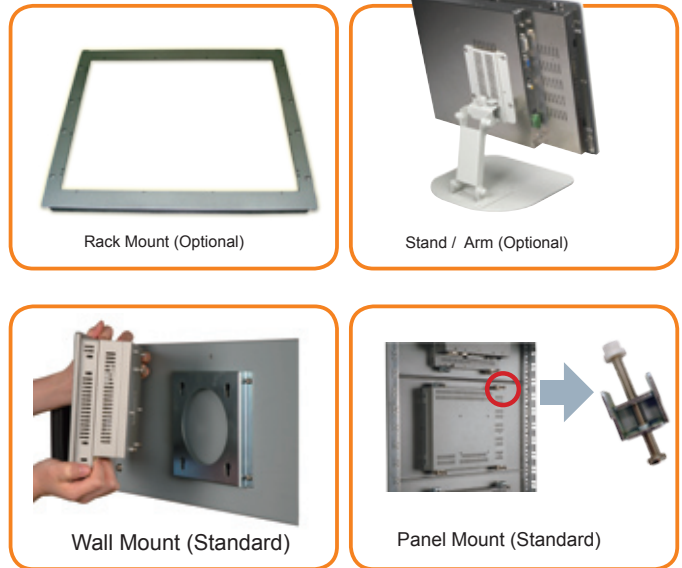

Packing List

Part Number	Description	Amount
19600-000207-RS	Screw Kit	1
32000-000002-RS	Power Cable	1
33100-000033-RS	Jumper Pack	1
32000-000138-RS	PS/2 Cable	1
63000-FSP0601AD101C712-RS	Power Adapter 63000-FSP0601AD101C712-RS	1
	User Manual & Driver CD-ROM	1
PK-104M	Panel Mounting Kit	1
WK-104MS-R10	Wall Mounting Kit	1

Options

RK-104MS-R10	Rack mount kits
ARM-11-RS	LCD Monitor Arm
STAND-100-RS/STAND-A12	LCD Monitor Stand
DDR SO-DIMM :	
79300-M256-041-RS	256MB PROMOS ROHS
79300-M256-043-RS	256MB INFINEON ROHS
79300-M512-050-RS	512MB UNIGEN ROHS
79300-M512-049-RS	512MB SIS ROHS
79300-M512-032-RS	512MB SAMSUNG ROHS

Ordering Information

PPC-2710GS/AFLMB-LX-800	10.4" TFT Panel PC with AFLMB-LX-8 Silver Color, RoHS
PPC-2710GS/AFLMB-LX-800/T-R	10.4" TFT Panel PC with AFLMB-LX-800, Silver Color & Touch Screen, RoHS
PPC- 2710GS/AFLMB-LX-800W/T-R	10.4" TFT Panel PC with AFLMB-LX-800, Silver Color, 802.11b/g Wireless module and Touch Screen, RoHS

- 1 Single Board Computer
- 2 VIDEO CARD
- 3 Xscale Solutions
- 4 Open HMI
- 5 VITO Universal Controller
- 6 DINO BLADE
- 7 LCD Product Series

- 8 Embedded stem
- 9 Industrial computer assist

- 10 Power Supply

- 11 Peripherals