



Enano-6612LVDS

EPIC Form Factor with Intel® Pentium® M/ Celeron® M FSB 400/533MHz, CRT/LCD, GbE, SATA and Audio

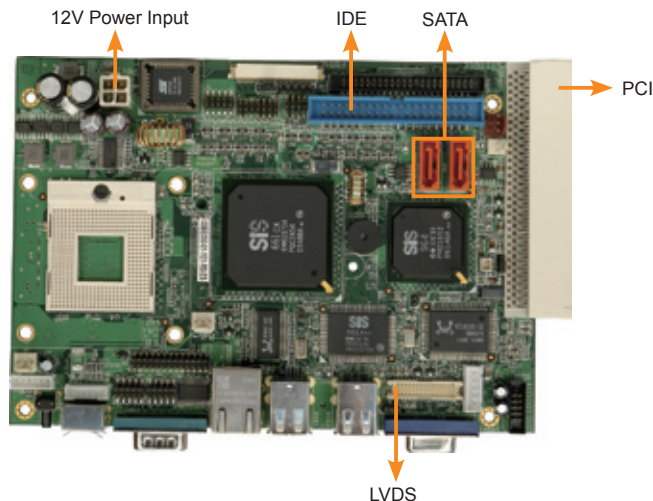

Solder Side

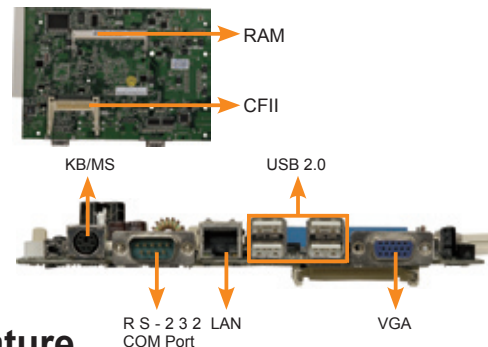

Feature

1. EPIC embedded board
2. Intel® Pentium® M/ Celeron® M FSB 400/533MHz processor
3. DDR 200-pin SO-DIMM sockets of 400/333MHz up to 1GB
4. Support dual 24-bit LVDS by SiS 302LV and CRT integrated in SiS 661CX
5. 4 x COM port, 2 x IDE, CFII, LAN, 2 x SATA, 6 x USB2.0 and LPT

Specification



- ◆ **CPU**
Socket 479 Intel® Pentium® M/Celeron® M support 400/533 MHz FSB up to 2.26GHz
- ◆ **System Chipset**
SiS 661CX + SiS 964
- ◆ **BIOS**
AMI BIOS
- ◆ **System Memory**
1 x 200-pin SO-DIMM DDR 333/400MHz up to 1GB
- ◆ **Ethernet**
RTL8110S for GbE
- ◆ **I/O**
6 x USB 2.0
1 x LPT
2 x SATA-150 with RAID 0,1 function support
1 x CFII
3 x RS-232
1 x RS-232/422/485
1 x PS/2 for KB/MS
2 x IDE
- ◆ **Expansion**
1 x PCI
- ◆ **Digital I/O**
8 bit digital I/O, 4 input/ 4 output by super I/O

- ◆ **Super I/O**
Winbond 83697HG
- ◆ **IrDA**
1x IrDA by pin header
- ◆ **Audio**
AC'97 2.3 Realtek ALC655
- ◆ **Display**
CRT integrated in SiS 661CX
- ◆ **LVDS**
Dual 24-bit LVDS by SiS 302LV
- ◆ **Watchdog Timer**
Software programmable 1-255 sec. by super I/O
- ◆ **Power Supply**
+12V only, AT/ATX support
- ◆ **Power Consumption**
+12V@3.32A-3D MARK
(Pentium® M 1.8G FSB 400MHz with 256MB/ DDR 400MHz RAM)
- ◆ **Temperature**
Operation: 0 ~ 60° C (32 ~ 140° F)
- ◆ **Humidity**
Operation: 5% ~ 95%, non-condensing
- ◆ **Dimension**
185 mm x 123 mm
- ◆ **Weight**
GW: 800 g; NW: 300 g

Packing List

1 x Enano-6612 Single Board Computer	2 x RS-232 Cable (P/N: 32200-000049-RS)
1 x IDE Flat Cable (P/N: 32200-000052-RS)	1 x ATX 12V Power Cable (P/N: 32100-087100-RS)
1 x KB/PS2 Mouse Y Cable (P/N: 32000-000138-RS)	1 x Mini Jumper Pack
1 x Audio Cable (P/N: 32000-072100-RS)	1 x Utility CD
2 x SATA Cable (P/N: 32000-062800-RS)	1 x QIG (Quick Installation Guide)
1 x SATA Power Cable (P/N: 32100-088600-RS)	

Ordering Information

Part No.	Description
Enano-6612LVDS-R10	EPIC SBC with Intel® Pentium® M/ Celeron® M processor FSB 400Mhz, CRT/LCD, GbE, SATA and Audio
CF-518-RS	CPU Cooler
32000-070300-RS	USB Cable
32200-026500-RS	RS-232/422/485 Cable
32200-000009-RS	ATA-33 Flat Cable
32200-015100-RS	LPT Cable