


ROCKY-6610 First SIS industrial 661CX of Pentium® 4 Platforms Long Term Support in the market

PICMG 1.0 Socket 478 Intel® Pentium® 4/ Celeron® D CPU Card with VGA, GbE and SATA RAID function support

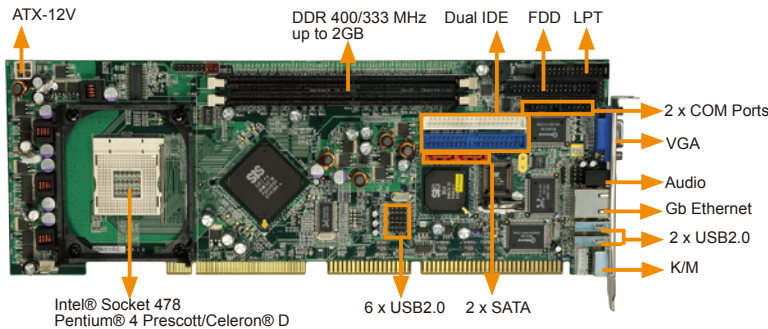

Feature

1. PICMG 1.0 and RoHS compliance
2. Long term support
3. Intel® Socket 478 Pentium 4/Celeron® D CPU support up to 800MHz FSB
4. 2 x SATA, 8 x USB2.0 and Audio intergrated

Specification



- ◆ CPU
Socket 478 Intel® Pentium 4/Celeron®-D support 800/533 MHz FSB up to 3.4GHz with Hyper-Threading Technology.
- ◆ System Chipset
SiS 661CX + SiS 964
- ◆ BIOS
AMI Flash BIOS
- ◆ System Memory
2 x DDR 184-pin 400/333MHz up to 2GB
- ◆ Ethernet
Realtek RTL8110S GbE
- ◆ I/O
I/O Interface
2 x RS-232
1 x LPT
1 x IrDA
8 x USB 2.0
2 x SATA-150 with RAID 0,1 function support
2 x IDE
1 x FDD
1 x PS2 KB / MS
- ◆ Digital I/O
8 bit digital I/O, 4 input / 4 output
- ◆ Super I/O
Winbond W83697HG
- ◆ Display
Graphic controller
CRT integrated in SiS 661CX
- ◆ Audio
Realtek ALC655 with AC'97 codec
- ◆ Watchdog Timer
Software programmable supports 1~255 sec. system reset
- ◆ Power Supply
4 pin ATX 12V, AT/ATX support
- ◆ Power Consumption
+5V @ 3.10A, +12V @5.45 A (P4-3.2G/512K/800(HT)CPU with 2GB DDR 400MHz)
- ◆ Temperature
operation: 0 ~ 60° C (32 ~ 140° F)
- ◆ Humidity
operation: 5% ~ 95% non-condensing
- ◆ Dimension
338mm X 122mm
- ◆ Weight
GW: 1.1Kg

Packing List

1 x ROCKY-6610 single board computer	1 x ATX-12V cable (P/N: 32100-087100-RS)
1 x Mini jumper pack	1 x RS-232 cable(2 COM Ports) :(P/N: 19800-000051-RS)
1 x ATA 66/100 flat cable (P/N: 32200-000052-RS)	1 x USB cable (P/N: CB-USB02-RS)
2 x SATA cable (P/N: 32000-062800-RS)	1 x Utility CD
1 x SATA power cable (P/N: 32100-088600-RS)	1 x QIG
1 x Keyboard/ PS2 mouse Y cable (P/N: 32000-000138-RS)	

Ordering Information

Part No.	Description
ROCKY-6610-R10	PICMG 1.0 Socket 478 Intel® Pentium® 4/ Celeron®-D CPU Card with VGA, GbE and SATA
CF-519-RS	Socket 478 type CPU Cooler
32200-000017-RS	FDD cable
19800-000049-RS	LPT cable