
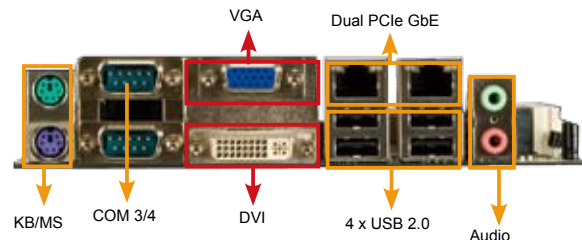


KINO-9453-R11

Mini-ITX Motherboard with Intel Core™2 Duo CPU with VGA/DVI, Dual PCIe GbE, USB 2.0, SATA and Audio

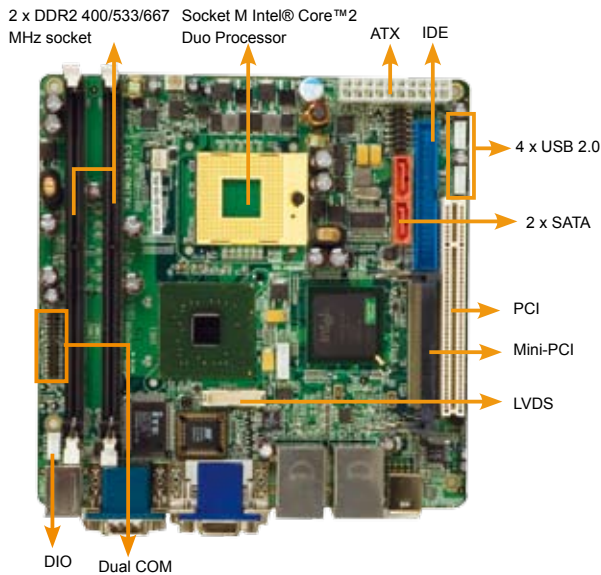

Features

1. Mini-ITX form factor and RoHS compliant
2. Intel® Core™2 Duo CPU FSB 667MHz
3. DDR2 400/533/667 MHz up to 4GB
4. Support VGA/DVI, 18-bit dual-channels LVDS with dual display support
5. 4 x RS-232, 8 x USB 2.0 and 2 x SATA


Specifications

- ◆ CPU
Socket M Intel® Core™2 Duo, Core Duo/Solo with 667MHz FSB
Intel® Celeron® M 533MHz FSB
- ◆ System Chipsets
Intel® 945GM + ICH7M
- ◆ BIOS
AMI Flash BIOS
- ◆ System Memory
2 x 240-pin dual-channel DDR2 400/533/667 MHz up to 4GB
- ◆ Ethernet
Dual Broadcom BCM5787M GbE Chipsets (LAN1 with ASF2.0 remote control support)
- ◆ I/O Interface
3 x RS-232
1 x RS-232/422/485
8 x USB 2.0
2 x SATA
1 x IDE
2 x PS/2 KB/MS
- ◆ Expansions
1 x Mini-PCI
1 x PCI
- ◆ Digital I/O
8-bit digital I/O, 4-bit input/ 4-bit output
- ◆ Infrared Interface
N/A
- ◆ Super I/O
ITE IT8712F
- ◆ Display Interface
VGA Integrated in Intel 945GM
18-bit dual-channel LVDS
DVI by Intel 945GM SDVO interface with dual display support
- ◆ Audio
Realtek ALC655 with AC'97 codec
- ◆ SSD
N/A
- ◆ Watchdog Timer
Software programmable supports 1 ~255 sec. system reset
- ◆ Power Supply
AT/ATX Power
- ◆ Power consumption
5V@4.86A, 12V@1.75A
(Intel® Core™2 Duo T7400 2.16GHz/667 MHz CPU with 1GB DDR2 667MHz)
- ◆ Temperature
Operating: 0 ~ 60°C (32 ~ 140°F)
- ◆ Humidity
Operating: 5% ~95 non-condensing
- ◆ Dimensions
170 mm x 170 mm
- ◆ Weight
GW: 900 g / NW: 362 g

Packing List

- 1 x KINO-9453 Single Board Computer
- 1 x Mini Jumper Pack
- 1 x ATA66/100 Flat Cable (P/N: 32200-000052-RS)
- 2 x SATA Cable (P/N: 32000-062800-RS)
- 1 x SATA Power Cable (P/N: 32100-088600-RS)
- 1 x Dual RS-232 Cable (P/N: 32200-028401-RS)
- 1 x I/O Shielding
- 1 x Utility CD (P/N: 45014-008C0-00-RS)
- 1 x QIG

Dimensions (mm)

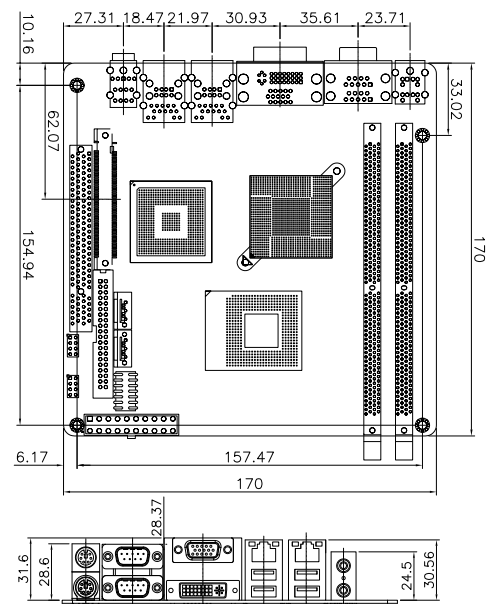

Ordering Information

Part No.	Description
KINO-9453-R11	Mini-ITX Motherboard with Intel Core™2 Duo CPU with VGA/DVI, Dual GbE, USB 2.0, SATA and Audio
32200-000077-RS	RS-232/422/485 Cable
CB-USB02-RS	Dual USB Cable
CB-USB14-RS	Four USB Cable
CF-479B-RS	CPU Cooler

1

Application
Server
Platform

2

Single
Board
Computer

3

IBX Series
POS PC

4

AFOLUX
POS
Panel PC

5

Video
Capture
Card

6

KAMIO
RISC

7

IOVU
Open HMI

8

VITO
Universal
Controller

9

DINO
BLADE

10

LCD
Product
Series

11

Embedded
System

12

Industrial
Computer
Chassis

13

Power
Supply

14

Peripherals