

**JUKI-760E Ver 2.X**  
**AMD-K6<sup>®</sup>-2/K6<sup>®</sup>-III/Pentium<sup>®</sup> Processor**  
**with LCD/CRT & Ethernet SBC**

© Copyright 1999 by ICP Electronics Inc. All Rights Reserved. Manual first edition Jul.01, 1999.

The information in this document is subject to change without prior notice in order to improve reliability, design and function and does not represent a commitment on the part of the manufacturer.

In no event will the manufacturer be liable for direct, indirect, special, incidental, or consequential damages arising out of the use or inability to use the product or documentation, even if advised of the possibility of such damages.

This document contains proprietary information protected by copyright. All rights are reserved. No part of this manual may be reproduced by any mechanical, electronic, or other means in any form without prior written permission of the manufacturer.

**Trademarks**

JUKI-760E is a registered trademark of ICP Electronics Inc. IBM PC is a registered trademark of International Business Machines Corporation. Intel is a registered trademark of Intel Corporation. AMI is a registered trademark of American Megatrends, Inc. Other product names mentioned herein are used for identification purposes only and may be trademarks and/or registered trademarks of their respective companies.



# Contents

1. Introduction .....	3
1.1 Specifications .....	4
1.2 What You Have .....	6
2. Installation.....	7
2.1 JUKI-760E's Layout .....	8
2.2 Unpacking Precautions.....	9
2.3 Setting the CPU of JUKI-760E .....	10
2.4 Voltage Setting for FLASH ROM .....	12
2.5 LCD Voltage Setting .....	12
2.6 Watch-Dog Timer .....	12
2.7 DiskOnChip™ Flash Disk.....	13
2.8 Clear CMOS Setup.....	14
2.9 RS232/RS422/RS485 Selector (COMB).....	14
2.10 RI and COM Port Voltage Selector.....	15
3. Connection.....	17
3.1 Floppy Disk Drive Connector.....	17
3.2 PCI E-IDE Disk Drive Connector .....	18
3.3 Parallel Port.....	19
3.4 Serial Ports.....	20
3.5 Keyboard/Mouse Connector .....	21
3.6 External Switches and Indicators .....	22
3.7 USB Port Connector .....	23
3.8 IrDA Infrared Interface Port .....	23

3.9	VGA Connector..	24
3.10	LAN RJ45 Connector .....	25
3.11	Fan Connector.....	26
3.12	LCD Connector.....	27
<b>4.</b>	<b>AMI BIOS Setup.....</b>	<b>28</b>
4.1	Getting Start.....	28
4.2	Standard CMOS Setup .....	29
4.3	Advanced CMOS Setup .....	30
4.4	Advanced Chipset Setup.....	32
4.5	Power Management Setup .....	34
4.6	PCI/PLUG AND PLAY Setup.....	35
4.7	Peripheral Setup .....	36
4.8	Auto Detect Hard Disk .....	38
4.9	Change Supervisor/User Password... ..	39
4.10	Auto Configuration with Optimal Settings.....	40
4.11	Auto Configuration with Fail Save Settings.....	40
4.12	Save Settings and Exit.....	41
4.13	Exit Without Saving .....	41
<b>5.</b>	<b>E<sup>2</sup>Key Function .....</b>	<b>42</b>
	Appendix A. Watch-Dog Timer .....	44
	Appendix B. ATX Power Supply.....	45
	Appendix C. I/O Information.....	46
	Appendix D. AMD-K6 <sup>®</sup> Processor Voltage..	48
	Appendix E. Flat Panel Connection Module..	49

# 1

## Introduction

Welcome to the JUKI-760E 500MHz K6<sup>®</sup>/Pentium<sup>®</sup> with LCD/CRT & 10/100Mbps Ethernet Single Board Computer. The JUKI-760E is a PICMG bus form factor board. It is equipped with high performance K6<sup>®</sup>/Pentium<sup>®</sup> up to 500MHz Processor and advanced high performance multi-mode I/O, designed for the system manufacturers, integrators, or VARs that want to provide all the performance, reliability, and quality at a reasonable price.

This board has a built-in DiskOnChip<sup>™</sup> (DOC) Flash Disk socket for embedded application. The DOC Flash Disk provides software compatibility to hard disk. User can use any DOS command without any extra software utility. The DOC currently is available from 2MB to 144MB.

JUKI-760E uses C&T 65555 HiQPro<sup>™</sup> LCD/CRT chipset with 2MB EDO RAM display memory. The LCD interface can drive up to 1280 x 1024 resolution with 256 colors. It supports Mono, Color STN and TFT flat panel with 3.3V or 5V.

JUKI-760E uses the advanced Ali M1541/1543 Chipset which is 100% ISA/PCI compatible chipset with PCI 2.1 standard. In addition, this board provides three 168-pin sockets for its RAM, up to 768MB. The DIMM module is 3.3 V SDRAM.

---

## 1.1 Specifications :

- **Processor** : One Socket 7 supports Intel Pentium® MMX up to 233MHz, AMD K6®-3 up to 500MHz, 100/95/83.3/75/66MHz F.S.B.
- **Bus Architecture:** 32-bit PCI Bus and 16-bit ISA Bus Compatible
- **DMA channels** : 7
- **Interrupt levels** : 15
- **Chipset** : Ali M1541 supports up to 100MHz system bus and Ali M1543 super I/O controller.
- **L2 Cache Memory:** onboard pipelined Burst SRAM 512KB
- **System Memory** : three 168-pin DIMM sockets support 3.3V PC100 SDRAM, up to 768MB, ECC not supported.
- **LCD/CRT Controller** : CHIPS 65555 64-bit flat panel controller  
Built-in HiQColor™ Technology for super clean STN flat panel .  
CRT Resolution up to  
1280 x 1024, 256 color  
1024 x 768, 64K color  
800 x 600, 16M color  
Display Memory : 2MB EDORAM
- **10/100Mbps Ethernet Controller** : Realtek RTL8139 IEEE802.3u  
100BASE-TX standard  
Dual Auto-sensing interface to 10Mbps or 100Mbps Network  
RJ45 connector for 10BASE-T and 100BASE-TX  
Full Duplex capability  
Full Software driver support
- **On Board I/O:**
  - 1 Floppy Port (up to 2.88 MB, 3 mode)
  - 2 Serial Ports (2F8, 3F8)
  - 1 Parallel Port (ECP, EPP port)
  - FIR TX/RX Header (3E8)
- **USB port** : Support two USB ports for future expansion.
- **ISAPLUS™** : designed to enhance the ISA bus drive capability
- **Enhanced PCI IDE interface (Ultra DMA/33)** : supports two IDE hard disk drives

- **E<sup>2</sup>Key™** : A special designed 1Kbit EEPROM (non volatile memory) provided to accept read/ write data by customer's program. It is useful to store system ID, Password, Critical Data on the board.
- **Watch-dog timer** : can be set by 1, 2, 10, 20, 110 or 220 seconds period. Reset or NMI is generated when CPU does not periodically trigger the timer. Your program uses hex 043 and 443 to control the watch-dog and generate a system reset.
- **Flash Disk - DiskOnChip™ (optional)**: The Flash Disk provides software compatibility with hard disk, supports M-Systems. The built-in True FFS Transparent Flash Block Management and Space Reclamation will let customer to use the Flash Disk with DOS command, no need any extra software utility. The DOC currently is available from 2MB to 144MB.
- **ATX Power Supply** function.
- **Power Consumption** : +5V/5A (MMX-233MHz, 32MB EDO RAM)  
+12V:170mA , -12V:20mA
- **Operating Humidity** : 5 ~ 95 % , non-condensing
- **Operating Temperature** : 0 ~ 55°C (CPU needs cooler)

---

## 1.2 What You Have

In addition to this *User's Manual*, the JUKI-760E package includes the following items:

- JUKI-760E Single Board Computer
- Serial & Parallel Ribbon Cable and Port Bracket
- FDD/HDD Cable Sets
- 6-pin Mini-Din to one 5-pin Mini-Din for Keyboard and one 6-pin Mini-Din for PS/2 Mouse Adapter Cable.
- one support disk contains of the needed driver

If any of these items is missing or damaged, contact the dealer from whom you purchased the product. Save the shipping materials and carton in case you want to ship or store the product in the future.



# 2

## Installation


This chapter describes how to install the JUKI-760E. The layout of JUKI-760E is shown on the next page and the Unpacking Precautions that you should be careful with are described on the following page. Also included is the jumpers and switches setting for this board's configuration, such as: CPU type selection, system clock setting and Watchdog timer.

---

### 2.1 JUKI-760E 's Layout

< please, refer to the next page >

## 2.1 JUKI-760E 's Layout

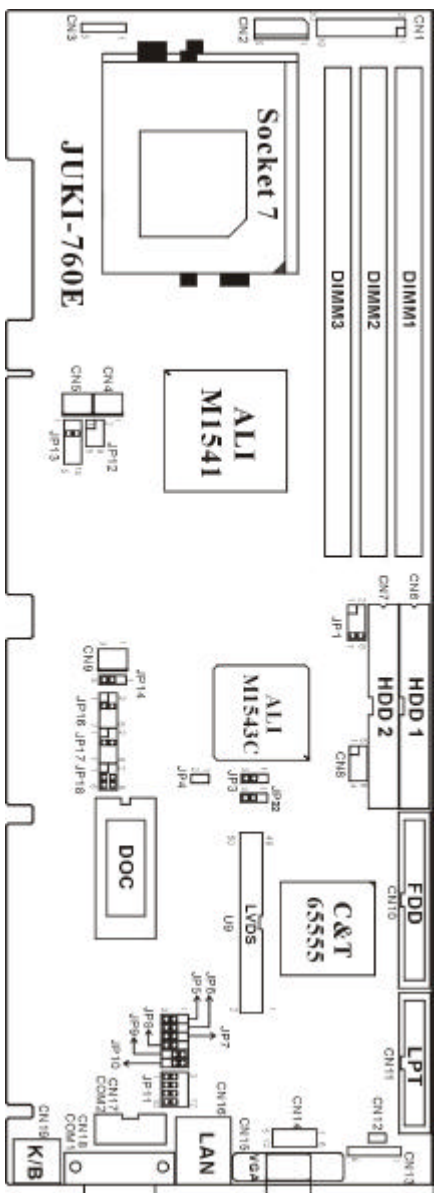

---

## 2.2 Unpacking Precautions


Some components on JUKI-760E SBC are very sensitive to static electric charges and can be damaged by a sudden rush of power. To protect it from unintended damage, be sure to follow these precautions:

- ✓ Ground yourself to remove any static charge before touching your JUKI-760E SBC. You can do it by using a grounded wrist strap at all times or by frequently touching any conducting materials that is connected to the ground.
- ✓ Handle your JUKI-760E SBC by its edges. Dont touch IC chips, leads or circuitry if not necessary.
- ✓ Do not plug any connector or jumper while the power is on.
- ✓ Do not put your JUKI-760E SBC unprotected on a flat surface because it has components on both sides.

 **WARNING** 

**Incorrect replacement of battery will cause explosion. Replace the Lithium battery of the real-time clock only with the same or equivalent type part. Dont dispose of the used battery in fire. Dispose of used parts in accordance with your local regulations.**

## 2.3 Setting the CPU of JUKI-760E

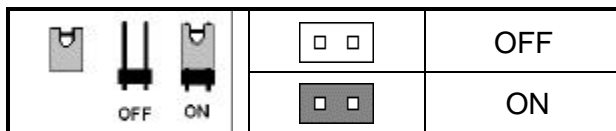

### . JP1 : CPU / PCI CLK SETTING

CPU CLK	PCI CLK	JP 1			
		1-2	3-4	5-6	7-8
60MHz	30MHz	ON	ON	ON	ON
66MHz	33MHz	OFF	ON	ON	ON
75MHz	37MHz	OFF	OFF	ON	ON
83MHz	33MHz	OFF	ON	OFF	ON
95MHz	33MHz	ON	OFF	OFF	ON
<b>100MHz</b>	<b>33MHz</b>	<b>OFF</b>	<b>OFF</b>	<b>OFF</b>	<b>ON</b>

### . JP13 : CPU (V core) Voltage Selector


Voltage	1-6	2-7	3-8	4-9	5-10
3.5	ON	ON	ON	ON	OFF
3.4	OFF	ON	ON	ON	OFF
3.3	ON	OFF	ON	ON	OFF
3.2	OFF	OFF	ON	ON	OFF
3.1	ON	ON	OFF	ON	OFF
3.0	OFF	ON	OFF	ON	OFF
2.9	ON	OFF	OFF	ON	OFF
2.8	OFF	OFF	OFF	ON	OFF
2.7	ON	ON	ON	OFF	OFF
2.6	OFF	ON	ON	OFF	OFF
2.5	ON	OFF	ON	OFF	OFF
2.4	OFF	OFF	ON	OFF	OFF
2.3	ON	ON	OFF	OFF	OFF
<b>2.2</b>	<b>OFF</b>	<b>ON</b>	<b>OFF</b>	<b>OFF</b>	<b>OFF</b>
2.1	ON	OFF	OFF	OFF	OFF
2.0	OFF	OFF	OFF	OFF	OFF

• **JP12 : CPU MULTIPLIER SETTING :**

Multiplier	1-2	3-4	5-6
2x	ON	OFF	OFF
2.5x	ON	ON	OFF
3.0 x	OFF	ON	OFF
<b>3.5 x</b>	<b>OFF</b>	<b>OFF</b>	<b>OFF</b>
4.0 x	ON	OFF	ON
4.5 x	ON	ON	ON
5.0 x	OFF	ON	ON
5.5x	OFF	OFF	ON

**Note:**

*Win95 will not run stable with all 350MHz and above K6-2 system. If you use AMD K6-2/350MHz to run Win95, oftenly the message 'Windows protection error. You need to restart your computer' will appear. This is AMD CPU's problem. To debug this problem, you must download and run the program: [amd6upd.zip](#) from AMD website.*

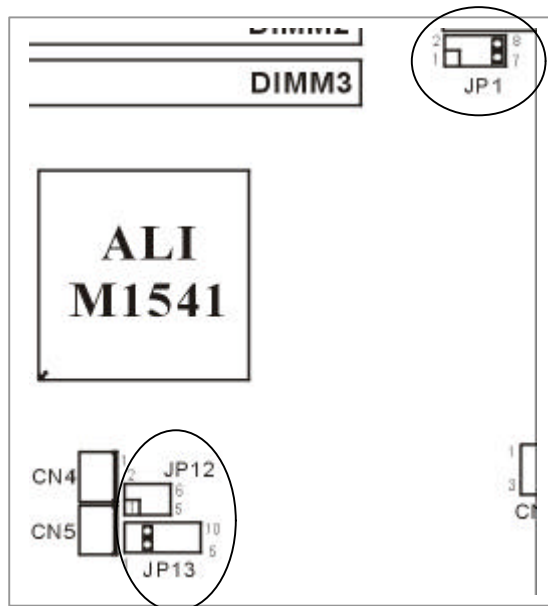

---

## 2.4 Voltage Setting for FLASH ROM

### • JP18 : Flash ROM Voltage Setting

PIN NO.	DESCRIPTION		MANUFACTURER
	VOLT.	SIZE	
1-3 , 2-4	+12V	1MB	INTEL 28F001-BX-T150
1-3 , 4-6	+12V	2MB	INTEL
<b>3-5 , 4-6</b>	<b>+5V</b>	<b>MB/2ME</b>	<b>SST/WINBOND/29EE010</b>
1-3 , 4-6	+12V	1MB	MX28F 1000

---

## 2.5 LCD Voltage Setting

### • JP3 & JP22 : LCD Voltage Setting

PIN NO.	DESCRIPTION
1-2	3.3V
<b>2-3</b>	<b>+5V</b>

***Warning:** wrong voltage setting may cause serious damage to your LCD display.*

---

## 2.6 Watch-Dog Timer

The Watch-Dog Timer is enabled by reading port 443H. It should be triggered before the time-out period ends, otherwise it will assume the program operation is abnormal and will issue a reset signal to reboot or activate NMI to CPU. The Watch-Dog Timer is disable by reading port 043H.

### • JP14 : Watch-Dog Timer Type Setting

PIN NO.	DESCRIPTION
1-2	NMI
<b>2-3</b>	<b>RESET</b>
OFF	Disable WDT

• **JP16 : WDT Time-out Period**


PERIOD	1-2	3-4	5-6	7-8
1 sec.	OFF	OFF	ON	OFF
2 sec.	OFF	OFF	ON	ON
<b>10 sec.</b>	<b>OFF</b>	<b>ON</b>	<b>OFF</b>	<b>OFF</b>
20 sec.	OFF	ON	OFF	ON
110 sec.	ON	OFF	OFF	OFF
220 sec.	ON	OFF	OFF	ON

## 2.7 DiskOnChip™ Flash Disk

The DOC is software compatible to hard disk. It is just “plug and play”, easy and reliable. Right now, the DOC is available from 2MB to 144MB.

• **JP17 : DOC Memory Address Setting**

PIN NO.	ADDRESS
1-2	CE00H
<b>3-4</b>	<b>D600H</b>
5-6	DE00H
7-8	Dont Care

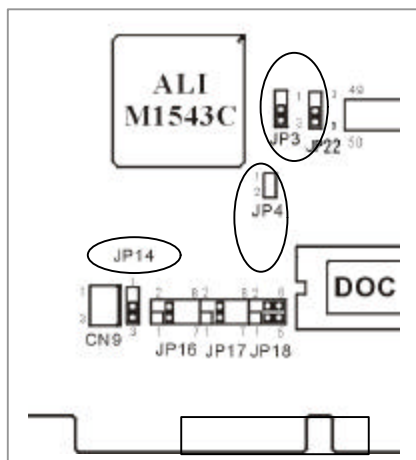

---

## 2.8 Clear CMOS Setup

If you forget the CMOS password, you can clear or reset it by closing the **JP4** for about 3 seconds then set it back to normal operation by opening the JP4. Now, the password has been cleared from your CMOS.

### • JP4 : Clear CMOS Setup

PIN NO.	DESCRIPTION
OFF	Normal Operation
ON	Clear CMOS

*Note: If you are using an ATX power supply, the ATX-powerconnector should be disconnected from the motherboard in order to be able to clear CMOS.*

---

## 2.9 RS232 / RS422 / RS485 Selector (COM2)

Combine the JP5 and JP11 user can select the COM2 as RS232, RS482 or RS485.

### • JP5 : RS422 / RS485 , RS232 Selector

PIN NO.	DESCRIPTION
1-2	RS422/RS485
2-3	RS232

### • JP11 : RS422 / RS232 Selector

DESCRIPTION	PIN NO.			
RS422/485	2-3	5-6	8-9	11-12
RS232	1-2	4-5	7-8	10-11

• **JP6 : Select the RTS signal to control/enable the RS485 output driver. Please refer to the below table for the function.**

RTS	1	0
RS485 driver	output	input

JP6	DESCRIPTION
1-2	RTS Select
2-3	RS-422



## 2.10 RI and COM Port Voltage Selector

### COM1


The RI pin of COM1 (CN18, pin#9) can be set as RI, +5V or +12V mode by setting the JP7 and JP9.

- **JP7 : RI or DC Power Select**

PIN NO	DESCRIPTION
1-2	DC Power Select (connect to JP9)
2-3	RI

- **JP9 : is a DC Power Voltage Selector, combined with JP7**

PIN NO	DESCRIPTION
1-2	+5V
2-3	+12V

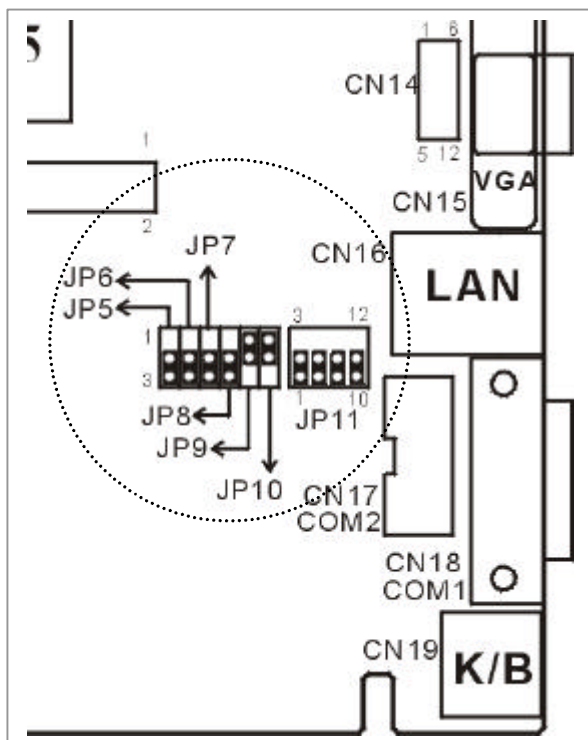

## **COM2**

The RI pin of COM2 (CN17, pin#8) can be set as RI, +5V or +12V mode by setting the JP8 and JP10

- **JP8 : RI or DC Power Select**

<b>PIN NO</b>	<b>DESCRIPTION</b>
1-2	DC Power Select (connect to JP10)
2-3	RI

- **JP10 : is a DC Power Voltage Selector, combined with JP8**

<b>PIN NO</b>	<b>DESCRIPTION</b>
1-2	+5V
2-3	+12V

*Note : when the output is set as 12V, the board should have +12V input too from power supply.*

# 3

## Connection

This chapter describes how to connect peripherals, switches and indicators to the JUKI-760E board.

### 3.1 Floppy Disk Drive Connector

JUKI-760E board is equipped with a 34-pin daisy-chain driver connector cable.

#### • CN10 : FDD CONNECTOR


PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	GROUND	2	REDUCE WRITE
3	GROUND	4	N/C
5	GROUND	6	N/C
7	GROUND	8	INDEX#
9	GROUND	10	MOTOR ENABLE A#
11	GROUND	12	DRIVE SELECT B#
13	GROUND	14	DRIVE SELECT A#
15	GROUND	16	MOTOR ENABLE B#
17	GROUND	18	DIRECTION#
19	GROUND	20	STEP#
21	GROUND	22	WRITE DATA#
23	GROUND	24	WRITE GATE#
25	GROUND	26	TRACK 0#
27	GROUND	28	WRITE PROTECT#
29	GROUND	30	READ DATA#
31	GROUND	32	SIDE 1 SELECT#
33	GROUND	34	DISK CHANGE#

### 3.2 PCI E-IDE Disk Drive Connector

You can attach four IDE (Integrated Device Electronics) hard disk drives to the JUKI-760E IDE controller.

• **CN6/CN7 : Primary/Secondary IDE Interface Connector**

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	RESET#	2	GND
3	DATA 7	4	DATA 8
5	DATA 6	6	DATA 9
7	DATA 5	8	DATA 10
9	DATA 4	10	DATA 11
11	DATA 3	12	DATA 12
13	DATA 2	14	DATA 13
15	DATA 1	16	DATA 14
17	DATA 0	18	DATA 15
19	GND	20	N/C
21	IDE DRQ	22	GND
23	IOW#	24	GND
25	IOR#	26	GND
27	IDE CHRDY	28	GND
29	IDE DACK	30	GND. <b>DEFAULT</b>
31	INTERRUPT	32	N/C
33	SA 1	34	N/C
35	SA 0	36	SA 2
37	HDC CS0#	38	HDC CS1#
39	HDD ACTIVE#	40	GND

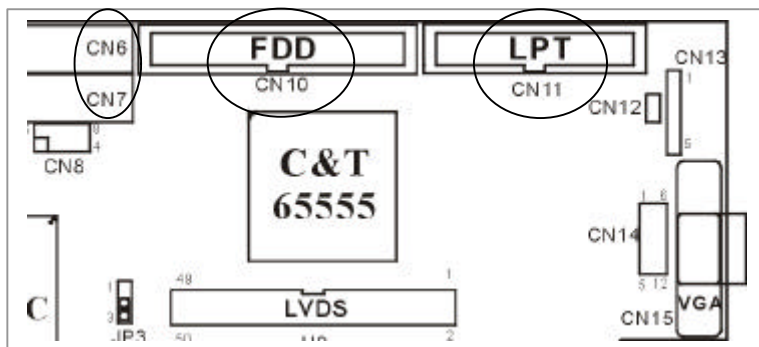

---

### 3.3 Parallel Port

This port is usually connected to a printer, The JUKI-760E includes an on-board parallel port, accessed through a 26-pin flat-cable connector CN11.

#### • CN11 : Parallel Port Connector


PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	STROBE#	2	DATA 0
3	DATA 1	4	DATA 2
5	DATA 3	6	DATA 4
7	DATA 5	8	DATA 6
9	DATA 7	10	ACKNOWLEDGE
11	BUSY	12	PAPER EMPTY
13	PRINTER SELECT	14	AUTO FORM FEED #
15	ERROR#	16	INITIALIZE
17	PRINTER SELECT LN#	18	GND
19	GND	20	GND
21	GND	22	GND
23	GND	24	GND
25	GND	26	N/C

### 3.4 Serial Ports

The JUKI-760E offers two high speed NS16C550 compatible UARTs with Read/Receive 16 byte FIFO serial ports (COMA/COMB).




#### • CN18 : Serial Port 9-pin D-sub Connector (COM1)

PIN NO.	DESCRIPTION
1	DATA CARRIER DETECT (DCD)
2	RECEIVE DATA (RXD)
3	TRANSMIT DATA (TXD)
4	DATA TERMINAL READY (DTR)
5	GROUND (GND)
6	DATA SET READY (DSR)
7	REQUEST TO SEND (RTS)
8	CLEAR TO SEND (CTS)
9	RING INDICATOR (RI)



#### • CN17 : Serial Port 2x5 pin header Connector (COM2)

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	DCD	6	DSR
2	RXD	7	RTS
3	TXD	8	CTS
4	DTR	9	RI
5	GND	10	N/C

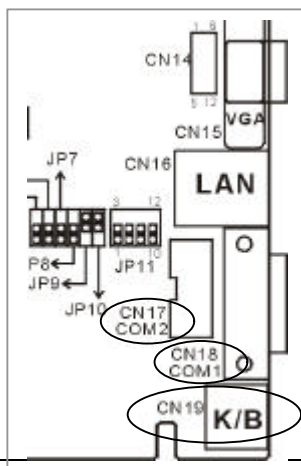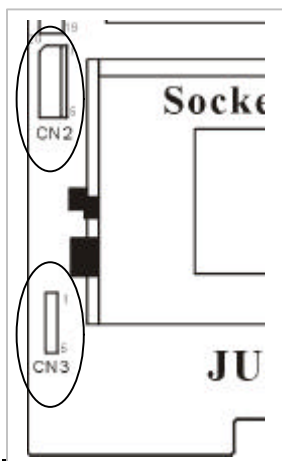


---

### 3.5 Keyboard/Mouse Connector

The JUKI-760E provides one external keyboard ,one external mouse and one PS/2 keyboard & mouse connectors.


• **CN2 : 5-pin Header Ext. Keyboard Connector**

PIN NO.	DESCRIPTION
1	KB CLOCK
2	KB DATA
3	N/C
4	GND
5	+5V



• **CN19 : 6-pin Mini-DIN PS/2 Keyboard Connector**

PIN NO.	DESCRIPTION
1	KB DATA
2	MS DATA
3	GND
4	+5V
5	KB CLOCK
6	MS CLOCK



• **CN3 : Ext. PS/2 Mouse 5-pin Header Connector**

PIN NO.	DESCRIPTION
1	MS DATA
2	N/C
3	GND
4	+5V
5	MS CLOCK




### 3.6 External Switches and Indicators

There are several external switches and indicators for monitoring and controlling your CPU board. All the functions are in the CN1 connector.

• **CN1 : Multi Panel**

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1.	SPEAKER	2	VCC
3.	N/C	4	N/C
5.	N/C	6	GND
7.	+5V	8	KEYLOCK
9.	RESET SW	10	GND
11.	GND	12	GND
13.	IDE LED	14	N/C
15.	+5V	16	ATX POWER CONTROL
17.	ATX POWER BUTTON	18	ATX 5VSB
19.	GND	20	ATX 5VSB

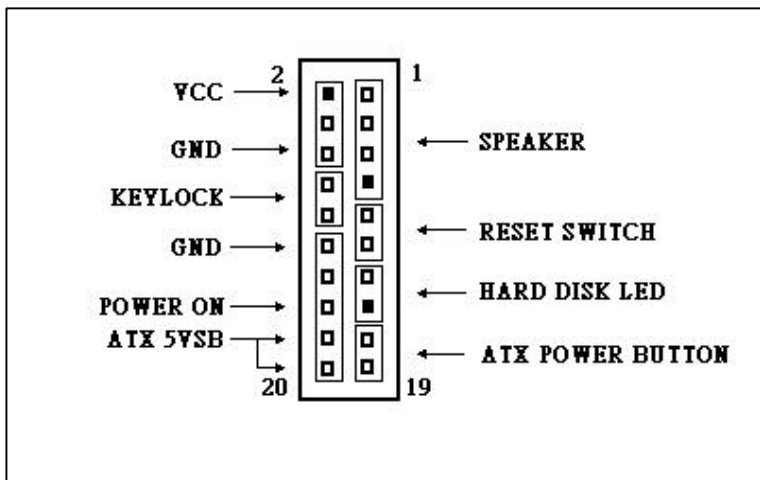



### 3.7 USB Port Connector

The JUKI-760E has two built-in USB ports for the future new I/O bus expansion.

• **CN8: 2 USB Connectors**


PIN NO.	USB0	PIN NO.	USB1
1	+5V	5	GND
2	SBD0-	6	SBD1+
3	SBD0+	7	SBD1-
4	GND	8	+5V

### 3.8 IrDA Infrared Interface Port

JUKI-760E has a built-in IrDA port which supports Serial Infrared (SIR) or Amplitude Shift Keyed IR (ASKIR) interface. If you want to use the IrDA port, you have to configure the SIR or ASKIR model in the BIOS's Peripheral Setup's COM 3.

• **CN13 : IrDA Connector**

PIN NO.	DESCRIPTION
1	VCC
2	N/C
3	IR-RX
4	GND
5	IR-TX
6	N/C

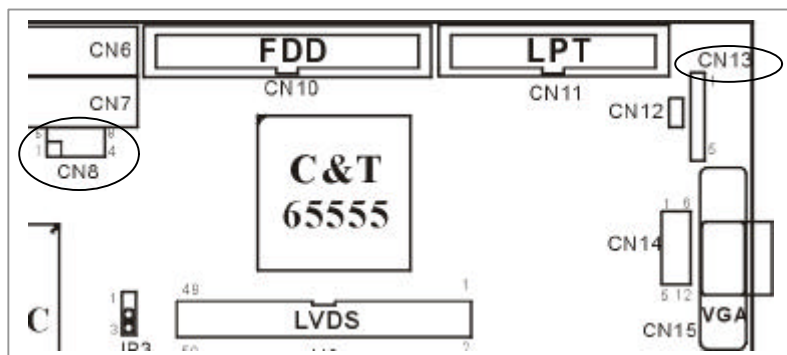


### 3.9 VGA Connector

The built-in 15-pin VGA connector can be connected directly to your monochrome CRT monitor as well as high resolution color CRT monitor.

- **CN15 : 15-pin Female VGA Connector**

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	RED	9	N/C
2	GREEN	10	GND
3	BLUE	11	N/C
4	N/C	12	DDC DATA
5	GND	13	H-SYNC
6	GND	14	V-SYNC
7	GND	15	DDC CLK
8	GND		

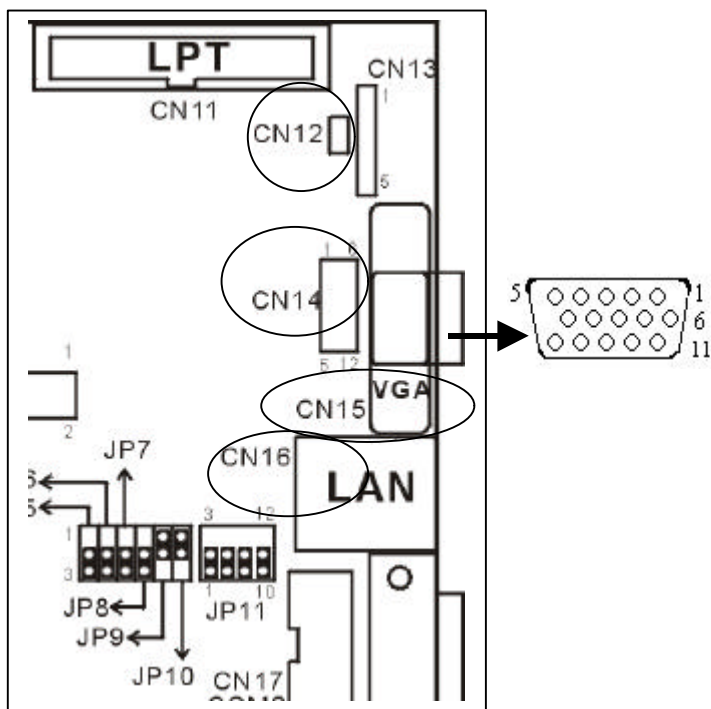

• **CN14 : Ext. VGA Connector**

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	RED	2	GREEN
3	BLUE	4	HSYNC
5	VSYNC	6	DDDA*
7	DDCK*	8	GROUND
9	GROUND	10	GROUND

---

### 3.10 LAN RJ45 Connector

JUKI-760E is equipped with a built-in 10/100Mbps Ethernet Controller. You can connect it to your LAN through RJ45 LAN connector. The pin assignments are as following:

• **CN16 : LAN RJ45 Connector**

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	TX+	5.	N/C
2	TX-	6.	RX-
3.	RX+	7.	N/C
4.	N/C	8.	N/C

• **CN12 : LED Connector for LAN**


PIN NO.	DESCRIPTION
1	VCC
2	LAN ACT.

### 3.11 Fan Connector

The JUKI-760E provides one CPU cooling fan connector and two system fan connectors. These connectors can supply 12V/500mA to the cooling fan. The connector has a "rotation" pin which supplies the fan's rotation signal to the system, so the system BIOS knows the fan speed. Please note that only specified fan offers the rotation signal .

- **CN4 : CPU Fan Connector**
- **CN5 : System1 Fan Connector**
- **CN9 : System2 Fan Connector**


PIN NO.	DESCRIPTION
1	Fan Sensor
2	+12V
3	GND

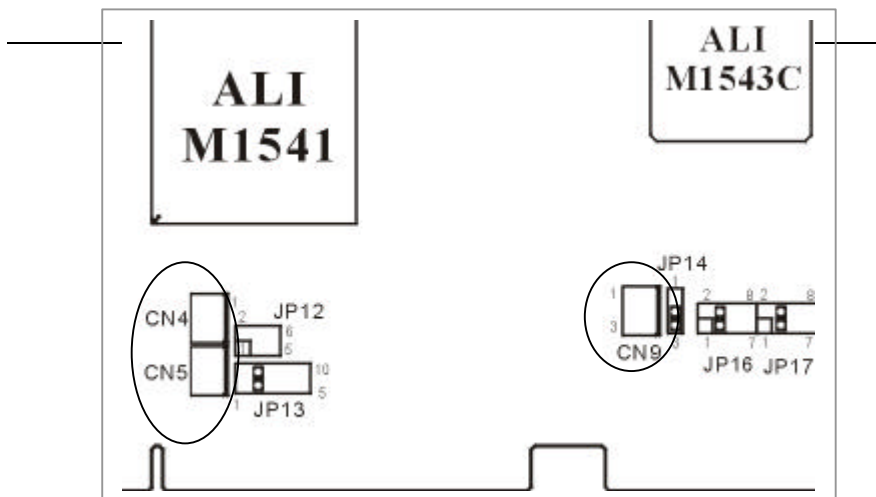

### 3.12 LCD Connector

• U9: LCD Interface Connector

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	VPCLK	2	P33
3	P34	4	P31
5	P35	6	P32
7	P30	8	P28
9	P29	10	P27
11	P25	12	P26
13	P24	14	P21
15	P23	16	P22
17	P16	18	P20
19	P17	20	P18
21	P19	22	P14
23	P13	24	P12
25	P15	26	P11
27	P7	28	P10
29	PLCD	30	PLCD
31	P9	32	P8
33	P4	34	P6
35	P3	36	P5
37	P2	38	P1
39	M	40	P0
41	SHFCLK	42	ENABKL
43	FPVDD	44	FLM
45	FPVEE	46	LP
47	GND	48	GND
49	+12V	50	+12V

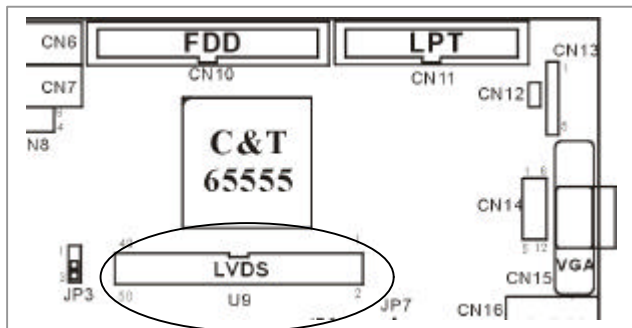

## AMI BIOS Setup

The JUKI-760E uses the AMI PCI/ISA BIOS for system configuration. The AMI BIOS setup program is designed to provide maximum flexibility in configuring the system by offering various options which may be selected for end-user requirements. This chapter is written to assist you in the proper usage of these features.


---

### 4.1 Getting Start

When you turn on the power button, the BIOS will enter the Power-On-Self-Test routines. These routines will be executed for system test and initialization and system configuration verification.

#### " Hit DEL if you want to run SETUP"

To access AMI PCI/ISA BIOS Setup program, press <Del> key. The following screen will be displayed at this time.

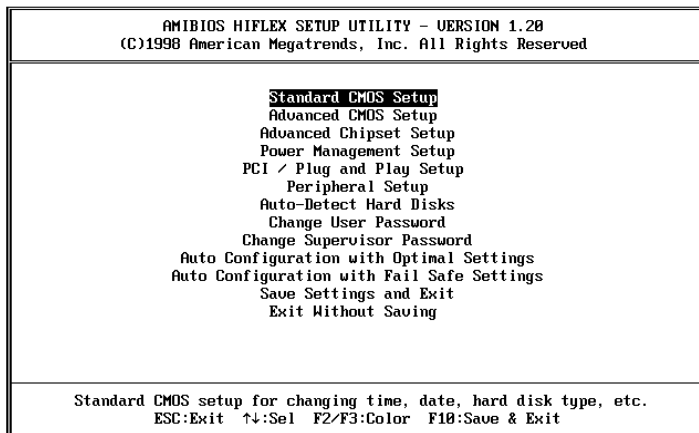

---

## 4.2 Standard CMOS Setup

The standard CMOS Setup is used for basic hardware system configuration. The main function is for Date/Time setting and Floppy/Hard Disk setting. Please refer to the following screen for this setup

AMIBIOS SETUP - STANDARD CMOS SETUP									
(C)1998 American Megatrends, Inc. All Rights Reserved									
Date (mm/dd/yyyy): Fri Jul 09, 1999					Base Memory: 0 KB				
Time (hh/mm/ss) : 17:07:11					Extd Memory: 0 MB				
Floppy Drive A: 1.44 MB 3½									
Floppy Drive B: Not Installed									
					LBA	Blk	PID	32Bit	
Type	Size	Cyln	Head	WPcom	Sec	Mode	Mode	Mode	Mode
Pri Master : Auto									0n
Pri Slave : Auto									0n
Sec Master : Auto									0n
Sec Slave : Auto									0n
Boot Sector Virus Protection					Disabled				
Available Options:					ESC:Exit ↑:Sel				
Not Installed					PgUp/PgDn:Modify				
360 KB 5¼					F2/F3:Color				
1.2 MB 5¼									
720 KB 3½									
▶ 1.44 MB 3½									

**To set the Date**, for example, press either the arrow or <Enter> button on your keyboard to select one of the fields (Months, Date or Year) then press either <PgUp> or <PgDn> to set it to the current Months, Date and Year. Do the same steps for Time setting.

**For IDE hard disk drive setup**, please check the following possible setup procedure:

1. Use the Auto setting for detection during boot-up.
2. Use the Auto-Detect Hard Disk option in the main menu; the computer will automatically detect the HDD specifications.
3. Manually enter the specifications by yourself from the "User" option.

---

## 4.3 Advanced CMOS Setup

This Advanced CMOS Setup is designed for tuning the best performance of the JUKI-760E board. As for normal operation customers don't have to change any default setting. The default setting is pre-set for most reliable operation.

The following screen will be displayed if you select Advanced CMOS Setup:

AMIBIOS SETUP - ADVANCED CMOS SETUP (C)1998 American Megatrends, Inc. All Rights Reserved		
<b>1st Boot Device</b>	<b>Floppy</b>	Available Options:
2nd Boot Device	IDE-0	Disabled
3rd Boot Device	CDROM	IDE-0
Try Other Boot Devices	Yes	IDE-1
Quick Boot	Enabled	IDE-2
BootUp Num-Lock	On	IDE-3
Floppy Drive Swap	Disabled	▶ Floppy
Floppy Drive Seek	Enabled	LS-120
Floppy Access Control	Normal	ATAPI ZIP
HDD Access Control	Normal	CDROM
PS/2 Mouse Support	Enabled	SCSI
System Keyboard	Absent	NETWORK
Password Check	Setup	
Boot To OS/2	No	
External Cache	Enabled	
System BIOS Cacheable	Enabled	
Video BIOS Shadow	Enabled	
C000, 16k Shadow	Disabled	ESC:Exit ↑:Sel
CB00, 16k Shadow	Disabled	PgUp/PgDn:Modifg
D000, 16k Shadow	Disabled	F2/F3:Color

**1<sup>st</sup>, 2<sup>nd</sup>, 3<sup>rd</sup> Boot Device** > to define the sequence of boot drives after the routines check up completes. If the 1<sup>st</sup> Boot Device fails, the BIOS will attempt to boot from the 2<sup>nd</sup> or the 3<sup>rd</sup> device. The Optimal and Fail-Safe default settings are C:,A:,CDROM.

**Try Other Boot Devices** > the BIOS will try to boot from any other available device in the system if the 1<sup>st</sup>, 2<sup>nd</sup> and 3<sup>rd</sup> device fails to boot.

**Quick Boot** > *Enabled*: this will enable the BIOS to boot quickly when you turn on your computer. The BIOS will only check the first 1MB of the system memory.

**Quick Boot** > *Disabled*: the BIOS will test all system memory when it boots up. It will spend about 40 seconds until it receives a Ready signal from the HDD. It will also wait for you to press the <Del> key or not.



**BootUp Num-Lock** > to turn on/off the Num-Lock option on a enhanced keyboard when you boot. If you turn it off, the arrow keys on the numeric keypad can be used just as the other set of arrow keys on the keyboard and vice versa.

**Floppy Drive Swap** > this function enables you to swap the floppy disk drives via software or without moving the hardware.

**Floppy Drive Seek** > when this option is turned Enabled, BIOS will perform a Seek command on floppy drive A: before boot-up.

**Floppy Access Control** > to define the read/write access which is set when booting from a floppy drive.

**Hard Disk Access Control** > to define the read/write access which is set when booting from a HDD.

**PS/2 Mouse Support** > to testify whether or not a PS/2 mouse is supported.

**S.M.A.R.T. for Hard Disks** > to allow BIOS to use the **S**ystem **M**anagement and **R**eporting **T**echnologies protocol for reporting server system information on a network

**System Keyboard** > to configure the keyboard. If you set it Absent, BIOS will not report keyboard errors.

**Primary Display** > to define the type of display monitor of the system. The Absent option is for network file servers.

**Password Check** > to define if a password is necessary or not for access to the BIOS setup.

**Boot to OS/2** > if you run the OS/2 operating system, this option must be set to yes. It means you permit BIOS to run properly if OS/2 or any other OS that does not support Plug and Play is found in your computer.

**External Cache** > to enable or disable the external cache.

**System BIOS Cacheable** > to define whether or not the memory segment F000H can be read from or written to cache memory. Setting it Enabled will give faster execution in your system.

**XXXX, 16k Shadow** > ROM Shadow is a technique in which BIOS code is copied from slower ROM to faster RAM. If you enable it then the BIOS will be executed from the RAM. Each option allows 16KB segment to be shadowed to the RAM.

## 4.4 Advanced Chipset Setup

This setup functions are working mostly for Chipset. These options are used to change the Chipsets registers. Please carefully change any default setting ,otherwise the system will run unstably.

AMIBIOS SETUP - ADVANCED CHIPSET SETUP (C)1998 American Megatrends, Inc. All Rights Reserved		
<b>SDRAM CAS Latency</b>	<b>Auto</b>	<b>Available Options:</b> 3 2 ▶ Auto  ESC:Exit ↑↓:Sel PgUp/PgDn:Modify F2/F3:Color
SDRAM Burst X-1-1-1-1-1-1	Enabled	
DRAM Timing	Normal	
Pipe Function	Enabled	
SDRAM RASJ Precharge Time	4T	
SDRAM RASJ Cycle Time	9T	
SDRAM RASJ to CAS delay	4 CLKs	
Gated Clock	Disabled	
Graphic Aperture Size	64MB	
Primary Frame Buffer	Enabled	
UGA Frame Buffer	Enabled	
Data Merge	Disabled	
Passive Release	Enabled	
ISA Line Buffer	Enabled	
Delay Transaction	Disabled	
AT Bus Clock	Auto	
Memory Hole	Disabled	

**SDRAM CAS# Latency** > to specify the CAS latency timing, which means when memory receives CAS signal, how many clock must the memory wait before it starts to read or write data.

**SDRAM Burst X-1-1-1-1-1-1** > to enable or disable Burst mode to write or read the data in SDRAM

**DRAM Timing** > to specify the timing mode of DRAM. The options are: Normal, Fast, Slow.

**Pipe function** > to enable or disable the pipe function.

**SDRAM RASJ Precharge Time** > this option specifies the length of time for Row Address Strobe form SDRAM to precharge. Options: 2T, 3T, 4T, 5T.

**SDRAM RASJ Cycle Time** > to choose the time cycle of SDRAM RASJ. Options: 7T, 8T, 9T, 10T.

**SDRAM RASJ to CAS Delay** > when CPU reads/writes data from memory, it has to send RAS signal first and then send CAS signal. This option is used to specify the delay between these signals. Options: 3CLKs, 4CLKs.

**Gated Clock >** to enable or disable the control of the gated time and wakeup time of the DRAM sequencer and the DRAM controller.

**Graphic Aperture Size >** to define the size of Graphic Aperture. Options: 4MB, 8MB,... , 256MB

**Primary Frame Buffer >** to enable or disable the buffer for primary frame

**VGA Frame Buffer >** to specify whether or not a caching of the video RAM is allowed. *Enabled* will give you better system performance.

**Data Merge >** if enabled, only consecutive linear address can be merged.

**ISA Line Buffer >** to enable or disable the buffer for ISA Line.

**Delayed Transaction >** to enable or disable the support for delay transaction for PCI specification 2.1.

**AT Bus Clock >** to specify the I/O bus clock setting.

**Memory Hole :** to specify the location of a memory hole in the CMOS RAM. This setting reserve 15MB to 16MB memory address space for ISA expansion cards that specifically require this setting. Memory from 15MB and up will be unavailable to the system because expansion cards can only access memory up to 16MB.

## 4.5 Power Management Setup

AMIBIOS SETUP - POWER MANAGEMENT SETUP (C)1998 American Megatrends, Inc. All Rights Reserved		
<b>Power Management/APM</b>	<b>Disabled</b>	Available Options: ▶ Disabled Enabled
Green Monitor Power State	Off	
Video Power Down Mode	Disabled	
Hard Disk Power Down Mode	Disabled	
Standby Time Out	Disabled	
Suspend Time Out	Disabled	
Monitor Parallel Port	Yes	
Monitor Serial Port	Yes	
Monitor Floppy	Yes	
Monitor UGA	No	
Monitor Audio	No	
Monitor Pri-HDD	Yes	
Monitor Sec-HDD	No	
Power Button Function	Suspend	
Ring Resume From Soft Off	Disabled	
RTC Alarm Resume	Disabled	
RTC Alarm Date	Disabled	
RTC Alarm Hour	12	
RTC Alarm Minute	30	
RTC Alarm Second	30	
		ESC:Exit ↑:Sel PgUp/PgDn:Modify F2/F3:Color

**Power Management/APM** > to enable or disable the Advanced Power Management feature.

**Green Monitor Power State** > to specify the power state of the monitor after the specified period of display-idle has ended.

**Video Power Down Mode** > to specify the power state of the VESA VGA video subsystem after the specified period of display-idle has ended.

**Hard Disk Power Down Mode** > to specify the power state of the hard disk after the specified period of hard drive-idle has ended.

**Standby Time Out** > to specify the length of the system-idle period while the system is in full power on state. After this period of time has ended, the system will go into Standby state.

**Suspend Time Out** > to specify the length of the system-idle period while the system is in Standby state. After this period of time has ended, the system will go into Suspend state.

**Monitor XXX Port** > Enabling will allow the IRQ input to be monitored for both inactivating for entering Auot\_mode/SML\_mode and activating for entering Normal\_mode.

**Power Button Function** > to specify how the power button mounted externally on the chassis is used.

**RTC Alarm Date** > if enabled, the system will wakeup from suspend time according to the set time.

## 4.6 PCI / PLUG AND PLAY Setup

The setup help user handles the JUKI-760E board's PCI function. All PCI bus slots on the system use INTA#, thus all installed PCI slots must be set.

AMIBIOS SETUP - PCI / PLUG AND PLAY SETUP (C)1998 American Megatrends, Inc. All Rights Reserved		
Plug and Play Aware O/S	No	Available Options:
Clear NVRAM on Every Boot	No	▶ No
PCI Latency Timer (PCI Clocks)	64	Yes
PCI VGA Palette Snoop	Disabled	
OffBoard PCI IDE Card	Auto	
OffBoard PCI IDE Primary IRQ	Disabled	
OffBoard PCI IDE Secondary IRQ	Disabled	
Assign IRQ to PCI VGA	Yes	
PCI Slot1 IRQ Priority	Auto	
PCI Slot2 IRQ Priority	Auto	
PCI Slot3 IRQ Priority	Auto	
PCI Slot4 IRQ Priority	Auto	
DMA Channel 0	PnP	
DMA Channel 1	PnP	
DMA Channel 3	PnP	
DMA Channel 5	PnP	
DMA Channel 6	PnP	
DMA Channel 7	PnP	
IRQ3	ISA/EISA	ESC:Exit ↑:Sel
IRQ4	ISA/EISA	PgUp/PgDn:Modify F2/F3:Color

### Plug and Play Aware O/S > Yes or No

When PNP OS is installed, interrupts will be reassigned by the OS when the setting is Yes. When a non-PNP OS is installed or to prevent reassigning of interrupt settings, select setting to No.

**Clear NVRAM on Every Boot >** to specify whether BIOS has to clear NVRAM on every boot or not.

**PCI Latency Timer (PCI Clocks) >** to define the latency timing (PCI clock) for all PCI devices on the PCI bus.

**PCI VGA Palette Snoop >** this option is useful only for system with more than one VGA devices connected to it through different bus (one PCI and one ISA). To enable those various VGA devices to handle signal from the CPU on each set of palette registers of every video devices, it must be set *Enabled*.

**Offboard PCI IDE Card >** to specify if an offboard PCI IDE card is installed in your computer or not. You must specify the slot number on the board which will be used for the card.

**Offboard PCI IDE Primary (/Secondary) IRQ >** to specify the PCI interrupt that is assigned to the Primary (/Secondary) IDE channel on the offboard PCI IDE controller.

**Allocate IRQ to PCI VGA >** to allocate IRQ to PCI VGA, answer Yes and vice versa.

**PCI Slot (1,2,3,4) IRQ Priority >** to specify the IRQ priority to be used by the PCI devices on slot 1 to 4.

**DMA Channel (0,1,3,5,6,7) >** to indicate whether or not the DMA channel is assigned for a PnP or ISA card.

**IRQ (3,4,5,7,9,10,11,14,15) >** to assign the displayed IRQ to be used by a legacy ISA adapter card. The settings are ISA/EISA or PCI/PnP. It is recommended to assign at least 4 IRQ to PCI/PnP.

## 4.7 Peripheral Setup

This setup is working mostly on Chipset M1543C with super I/O. The options are used to change the Chipsets registers. Please carefully change any default setting to meet your application need perfectly.

AMIBIOS SETUP - PERIPHERAL SETUP (C)1998 American Megatrends, Inc. All Rights Reserved		
<b>OnBoard FDC</b>	<b>Enabled</b>	Available Options: Auto Disabled ▶ Enabled
OnBoard Serial Port1	3F8h/COM1	
OnBoard Serial Port2	2F8h/COM2	
Serial Port2 Mode	Normal	
IR Half-Duplex Time-Out	N/A	
OnBoard Serial Port3	N/A	
Serial Port3 Mode	N/A	
Serial Port3 IRQ	N/A	
Serial Port3 DMA	N/A	
IR Transceiver Module Type	N/A	
IR Half-Duplex Time-Out	N/A	
OnBoard Parallel Port	378h	
Parallel Port Mode	Normal	
EPP Version	N/A	
Parallel Port IRQ	7	
Parallel Port DMA Channel	N/A	
LCD CRT Selection	Both	
LCD Type	#4 800x600 STN	ESC:Exit ↑:Sel PgUp/PgDn:Modify F2/F3:Color
OnBoard IDE	Both	

**Onboard FDC >** to enable the FDC on your board. If you set it Auto, the BIOS will decide if the FDC should be enabled, automatically).

**Onboard Serial Port 1 (/2) >** to specify the I/O port address of the serial port 1(/2). If you set it Auto, the BIOS will decide the correct I/O port address, automatically.

**Serial Port2 Mode** > to specify the mode of serial port 2.

**IR Half-Duplex Mode** > to specify the mode of IR device that is connected to the IR port.

**Onboard Parallel Port** > to specify the I/O port address of the parallel port.

**Parallel Port Mode** > to specify the mode of parallel port. The options are:

*Normal* (normal parallel port mode),

*Bi-Dir* (supports bidirectional transfer),

*EPP* (supports devices that comply with the Enhanced Parallel Port specification),

*ECP* (supports devices that comply with the Extended Capabilities Port).

**Parallel Port IRQ** > to assign certain IRQ to the parallel port.

**Parallel Port DMA Channel** > available only if the parallel port mode is ECP.

**LCD CRT Selection** > to specify the display panel type that is connected to the system.

**LCD Type** > to choose LCD type that is connected to the system. Please, consult the LCD panel data sheet/specification for the LCD type (TFT or STN, etc) and the resolution. The followings are the available list of LCD panels:

- #1 1024 x 768 STN
- #2 1280 x 1024 TFT
- #3 640 x 480 STN
- #4 800 x 600 STN
- #5 640 x 480 TFT
- #6 640 x 480 18bit
- #7 1024 x 768 TFT
- #8 800 x 600 TFT
- #9 800 x 600 TFT
- #10 800 x 600 TFT
- #11 800 x 600 STN
- #12 800 x 600 STN
- #13 1024 x 768 TFT
- #14 1280 x 1024 STN
- #15 1024 x 600 STN
- # 16 1024 x 600 TFT

**Onboard IDE >** to define which on-board IDE controller channel(s) to be used. Available options are: Primary, Secondary, Both and Disabled.

---


## **4.8 Auto-Detect Hard Disk**

This option detects the parameters of an IDE hard disk drive (HDD sector, cylinder, head, etc) automatically and will put the parameters into the Standard CMOS Setup screen. Up to 4 IDE drives can be detected and the parameters will be listed in the box. Press <Y> if you accept these parameters. Press <N> to skip the next IDE drives.

*Note: If your IDE HDD was formatted in previous older system, incorrect parameters may be detected. In this case, you need to enter the correct parameters manually or low-level format the disk.*



## 4.9

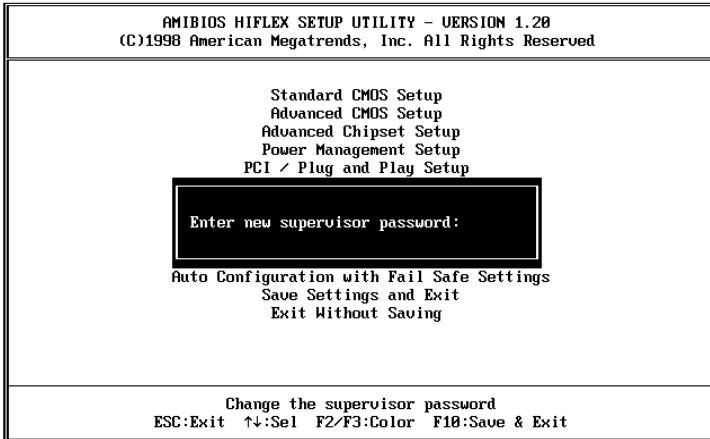

This option sets a password that is used to protect your system and Setup Utility. Supervisor Password has higher priority than User Password. Once you setup the password, the system will always ask you to key-in password every time you enter the BIOS SETUP. If you enter the BIOS SETUP with Supervisor Password, you can access every setup option on the main menu but with User Password you can only choose three setup options (USER PASSWORD, SAVE SETTING AND EXIT and EXIT WITHOUT SAVING). To disable these passwords, enter the BIOS SETUP menu with Supervisor Password and then just press the <Enter> key instead of entering a new password when the 'Enter Password' prompt pop-up.

---

## 4.10 Auto Configuration with Optimal Settings

This option lets you load the *Optimal* default settings. These settings are *best-case values* which will provide the best performance. Whenever your CMOS RAM is damaged, this Optimal settings will be loaded automatically.



---

## 4.11 Auto Configuration with Fail Save Settings

This option lets you load the *Fail Safe* default settings when something happens to your computer so that it cannot boot normally. These settings are not the most optimal settings but are the most stable settings.



---

## **4.12 Save Settings and Exit**

Select this option when you finish setting all the parameters and want to save them into the CMOS. Just simply press <Enter> key and all the configuration changes will be saved.

---

## **4.13 Exit Without Saving**

Select this option if you want to exit the Setup without saving the changes that you made. Just simply press <Enter> key and you will exit the BIOS SETUP without saving the changes.

## E<sup>2</sup> Key™ Function

The JUKI-760E provides an outstanding E<sup>2</sup>KEY™ function for system integrator. Based on the E<sup>2</sup>KEY™, you can free to store the ID Code, Password or Critical Data in the 1Kbit EEPROM. Because the EEPROM is nonvolatile memory, you don't have to worry for losing very important data.

Basically the E<sup>2</sup>KEY™ is based on a 1Kbit EEPROM which is configured to 64 words (from 0 to 63). You could access (read or write) each word at any time.

When you start to use the E<sup>2</sup>KEY™ you should have the utility in the package. The software utility will include four files as follows,

**README.DOC**  
**E2KEY.OBJ**  
**EKEYDEMO.C**  
**EKEYDEMO.EXE.**

The E2KEY.OBJ provides two library functions for user to integrate their application with E<sup>2</sup>KEY™ function. These library (**read\_e2key** and **write\_e2key**) are written and compiled in C language. Please check the following statement, then you will know how to implement it easily.

**unsigned int read\_e2key(unsigned int address)**

/\* This function will return the E<sup>2</sup>KEY™'s data at address. The address range is from 0 to 63. Return data is one word, 16 bits

**\*/void write\_e2key(unsigned int address, unsigned data)**

/\* This function will write the given data to E<sup>2</sup>KEY™ at certain address. The address range is from 0 to 63. The data value is from 0 to 0xffff. \*/

To easily start to use the function, please refer to the included EKEYDEMO.C code at first.

Please note that the E<sup>2</sup>KEY™ function is based on the working of parallel port. So you should enable the JUKI-760Es parallel port, otherwise it will not work.

# Appendix A. Watch-Dog Timer

The WatchDog Timer is provided to ensure that standalone systems can always recover from catastrophic conditions that cause the CPU to crash. This condition may have occurred by external EMI or a software bug. When the CPU stops working correctly, hardware on the board will either perform a hardware reset (cold boot) or a Non-Maskable Interrupt (NMI) to bring the system back to a known state.

Two I/O ports control the WatchDog Timer .:

443 (hex)	Read	Enable to refresh the WatchDog Timer.
843 (hex)	Read	Disable the WatchDog Timer.

To enable the WatchDog Timer, a read from I/O port 443H must be performed. This will enable and activate the countdown timer which will eventually time-out and either reset the CPU or cause a NMI, depending on the setting of JP14. To ensure that this reset condition does not occur, the WatchDog Timer must be periodically refreshed by reading the same I/O port 443H. This must be done within the time-out period that is selected by jumper group JP16.

**A tolerance of at least 30% must be maintained to avoid unknown routines within the operating system (DOS), such as disk I/O that can be very time-consuming. Therefore, if the time out period has been set to 10 seconds, the I/O port 443H must be read within 7 seconds.**

---

*Note: when exiting a program it is necessary to disable the WatchDog Timer, otherwise the system will reset.*


---

# Appendix B. ATX Power Supply

The following note and picture show how to connect ATX Power Supply to the backplanes and SBC card.

Please, disconnect the AC cord of the Power Supply from the AC source to prevent sudden electric surge to the board.

**JUKI-760E** (through Power Button & +5VSB):

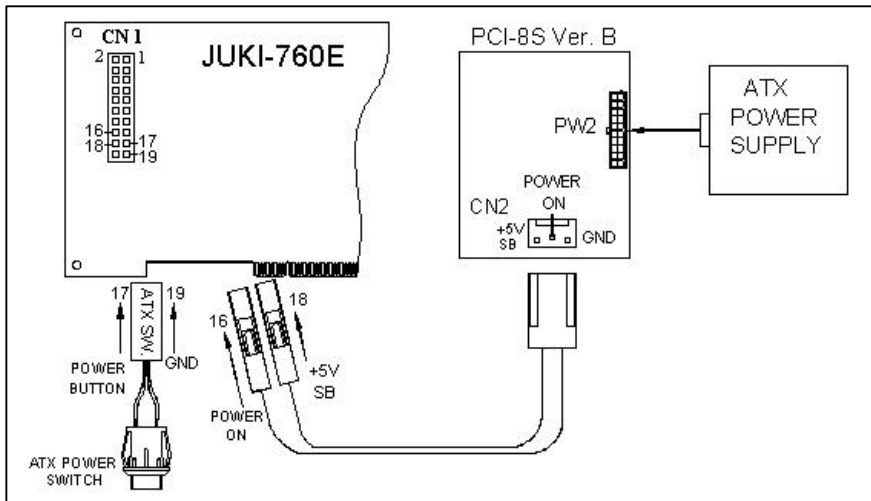

Connect the ATX power supply switch to the pin 17 (power button) and pin 19 (GND) of CN1 (multi panel) on the board.

If you wish to turn off the power supply, please push the ATX power supply button for about 4 sec. And to turn ON the system, simply push the button once.

# Appendix C. I/O Information

## IO Address Map

I/O address Range	Description
000-01F	DMA Controller #1
020-021	Interrupt Controller #1, Master
040-05F	8254 timer
060-06F	8042 (Keyboard Controller)
070-07F	Real time Clock, NMI (non-maskable interrupt) Mask
080-09F	DMA Page Register
0A0-0BF	Interrupt Controller #2
0C0-0DF	DMA Controller #2
0F0	Clear Math Coprocessor Busy
0F1	Reset Math Coprocessor
0F2	Core Logic Programming Configuration
0F8-0FF	Math Coprocessor
1F0-1F8	Fixed Disk
200-207	Game I/O
278-27F	
2E8-2EF	
2F8-2FF	Serial Port 2
300-31F	Prototype Card
360-36F	Reserved
378-37F	Parallel Printer Port 1 (LPT1)
3B0-3BF	Monochrome Display and Printer Adapter
3C0-3CF	Reserved
3D0-3DF	Color /Graphics Monitor Adapter
3E8-3EF	IR Port
3F0-3F7	Diskette Controller
3F8-3FF	Serial Port 1
443	Watch Dog Timer Enable
843	Watch Dog Timer Disable



## 1st MB Memory Address Map

Memory address	Description
00000-9FFFF	System Memory
A0000-BFFFF	VGA Buffer
C0000-C7FFF	VGA Bios
*D6000-DDFFF	DOC 2000
F0000-FFFFF	System BIOS
1000000-	Extend BIOS

## IRQ Mapping Chart

IRQ0	System Timer	IRQ8	RTC Clock
IRQ1	Keyboard	IRQ9	Unused
IRQ2	Cascade to IRQ Controller	IRQ10	LAN
IRQ3	COM2	IRQ11	USB
IRQ4	COM1	IRQ12	PS/2 mouse
IRQ5	Unused	IRQ13	FPU
IRQ6	FDC	IRQ14	Primary IDE
IRQ7	Printer (LPT1)	IRQ15	Secondary IDE

## DMA Channel Assignments

DMA Channel	Function
0	Available
1	Available
2	Floppy Disk (8-bit transfer)
3	Available
4	Cascade for DMA controller 1
5	Available
6	Available
7	Available

## Appendix D. AMD-K6<sup>®</sup> Processor Voltage

CPU Type	Model	V-core	Typical Power	CPU Clock
AMD-K6/233	7	2.2V	8.10W	66 MHz
AMD-K6/266	7	2.2V	8.75W	66 MHz
AMD-K6/300	7	2.2V	9.25W	66 MHz
AMD-K6-2/266	8	2.2V	8.85W	66 MHz
AMD-K6-2/300-66	8	2.2V	10.35W	66 MHz
AMD-K6-2/300	8	2.2V	10.35W	100 MHz
AMD-K6-2/333-66	8	2.2V	11.40W	66 MHz
AMD-K6-2/333	8	2.2V	11.40W	95 MHz
AMD-K6-2/350	8	2.2V	11.98W	100 MHz
AMD-K6-2/366	8	2.2V	12.48W	66 MHz
AMD-K6-2/380	8	2.2V	12.95W	95 MHz
AMD-K6-2/400	8	2.2V	13.65W	100 MHz
AMD-K6-2/450	8	2.4V	17.05W*	100 MHz
AMD-K6-III/400	9	2.4V	16.1W*	100 MHz
AMD-K6-III/450	9	2.4V	17.7W*	100 MHz

\* these numbers are only estimates and are subject to change

*Note : this data is downloaded from AMD's website*

## Appendix E. Flat Panel Connection Module

The FP24-01 connection module is installed on the JUKI-760E as a standard product. The FP24-01 converts JUKI-760E's on board 50pin LCD interface signal to the 44-pin and 41pin (Hirose DF9-41P-1V) LCD connectors. The 44-pin or 41-pin connector will only support 24-bit flat panel.

### • J3 : 44-pin LCD Interface Connector

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	+12V	2	+12V
3	GND	4	GND
5	5V/3.3V	6	5V/3.3V
7	FPVEE	8	GND
9	P0	10	P1
11	P2	12	P3
13	P4	14	P5
15	P6	16	P7
17	P8	18	P9
19	P10	20	P11
21	P12	22	P13
23	P14	24	P15
25	P16	26	P17
27	P18	28	P19
29	P20	30	P21
31	P22	32	P23
33	GND	34	GND
35	SHFCLK	36	FLM
37	M	38	LP
39	GND	40	ENABKL
41	NC	42	NC
43	FPVDD	44	5V/3.3V

• **J1 : 41-pin LCD Interface Connector**

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	P20	2	GND
3	P16	4	5V or 3.3V
5	P21	6	P0
7	P17	8	P8
9	P22	10	P1
11	P18	12	P9
13	P23	14	P2
15	P19	16	P10
17	5V or 3.3V	18	P3
19	FLM	20	P11
21	M	22	P4
23	LP	24	P12
25	SHFCLK	26	P5
27	5V or 3.3V	28	P13
29	5V or 3.3V	30	P6
31	ENABKL	32	P14
33	FPVDD	34	P7
35	FPVEE	36	P15
37	GND	38	+12V
39	GND	40	+12V
41	N/C		

• **J2 : LCD Backlight Power Connector**

PIN NO.	DESCRIPTION
1	N/C
2	GND
3	+12V
4	GND
5	FPVEE Inverter Enable