

CPC-1201

High Integration Mobile PC System

Compact Chassis series


OEM Project Welcome!



Cooling fan with removable filter

PCMCIA I/II/III

Dimensions

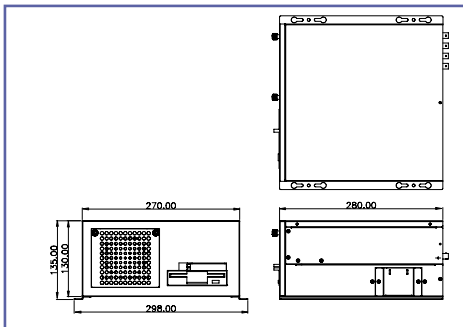

KM-086

Water-Proof Industrial Keyboard with Pointing Device



86 Key Water-Proof Keyboard with Pointing Device

SPECIFICATIONS

- ◆ Material : Industrial Silicon Rubber Keyboard/ Pointing Device and Plastic Case
- ◆ Integrated 86-key keyboard with pointing LED.
- ◆ Supports English keyboard
- ◆ Connector: Standard PS-II 6-pin MiniDIN adapter
- ◆ Colors : Black
- ◆ Dimension: 303.7(W)x168.7(D)x37.8(H) mm

ORDERING INFORMATION

◆ KM-086-US

86key Water-Proof Keyboard with pointing device for English language

SPECIFICATIONS

- ◆ Desktop or wall mount, equipped with wall mount kit
- ◆ One 8cm-cooling fan with removable filter
- ◆ Accept two half-size PCI add-on card
- ◆ Standard power supply:
 - ACE-810V power supply (12V DC Input, 100W power supply)
 - ACE-818C power supply (24V DC Input, 140W power supply)
 - ACE-720APM mechanical class 200W AC input ATX power supply, no power battery support
- ◆ Option power battery (BM-12V : 3000mAH, BM-24V : 2000mAH)

Disk Drive Bay:

- ◆ 2 X 2.5" internal HDD Drive bays with best anti-vibration design
Meets MIL-STD-810F 514.5C-1 standard
- ◆ 1 X 3.5" FDD Drive bay

Main Board (CP800/ CC400):

- ◆ CPU: Intel low power PIII 800MHz or ultra low power Celeron 400MHz
Package type: 478-Pin Micro FC-BGA2 (mounted on board)
- ◆ System Chipset: Intel 815E + ICH2, PCI 2.2 compliant
- ◆ System Memory:
 - On board 256MB SDRAM and one PC100/133 SO-DIMM slot up to 512MB
- ◆ Display:
 - Build-in FW82815 chip
 - V-RAM: Shared with system memory (DVMT technology)
 - Resolution: Up to 1600x 1200, 8 bit color
 - Connector: DB-15 for CRT display
- ◆ Two ATA-33 IDE RAID channel (Promise PDC 20267)
- ◆ SSD: Compact Flash type II socket on board
- ◆ WDT function: Software programmable support 1~255 second system reset
- ◆ Hardware Monitoring (CPU Vcore; Vcc; CPU/System Fan speed and thermal)

I/O Connectors (Front Side):


- ◆ PCMCIA: Cardbus interface support type I/II/III (Ricoh R54C476II)

I/O Connectors (Rear Side):

- ◆ Six D-Sub9 connector for RS-232
- ◆ One D-Sub25 for LPT
- ◆ One D-Sub15 for CRT VGA output
- ◆ Two PS/2 for keyboard and mouse
- ◆ One RJ-45 for Intel 82540 Gigabit Ethernet
- ◆ Two USB 2.0
- ◆ 36 pin connector for extension IDE device
- ◆ Audio (Lin-in, Lin-out, Mic-in)
- ◆ C-media 5.1 Channel PCI hardware sound, 6W Amplifier
- ◆ Four video capture inputs with BNC connector
 - Chip: Conexant Fusion 878A chip (Multiplexed function)
 - Frame speed: 30 FPS
 - Video Format: NTSC/ PAL/ SECAM

Environment:

- ◆ Vibration: 5~17Hz, 0.1 double amplitude displacement
17~640 Hz, 1.5G acceleration peak to peak
- ◆ Shock: 10G acceleration peak to peak (11ms)
- ◆ Operating temperature: 0~50°C
- ◆ Color: Black (Pantone Black C)
- ◆ Dimension: 270mm(W) x 130mm(H) x 280mm(D)

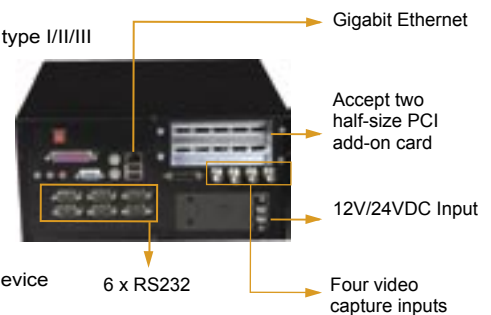

Battery Module

ORDERING INFORMATION

- | | | | |
|-----------|-------|------------|---|
| CPC-1201/ | CP800 | ACE-810V | Mobile PC with ACE-810V 100W 12VDC input power supply |
| | CC400 | /ACE-818C | Mobile PC with ACE-818C 140W 24VDC input power supply |
| | | ACE-720APM | Mobile PC with ACE-720APM 200W AC input power supply (No Battery support) |

Note: CP800: Low Power Pentium III 800MHz
CC400: Ultra Low Power Celeron 400MHz

Optional :

- BM-12V : Battery module for 12V DC input system, 3000mAH
- BM-24V : Battery module for 24V DC input system, 2000mAH