



MB-3792G

Dual Socket-370 Processor ATX Main Board

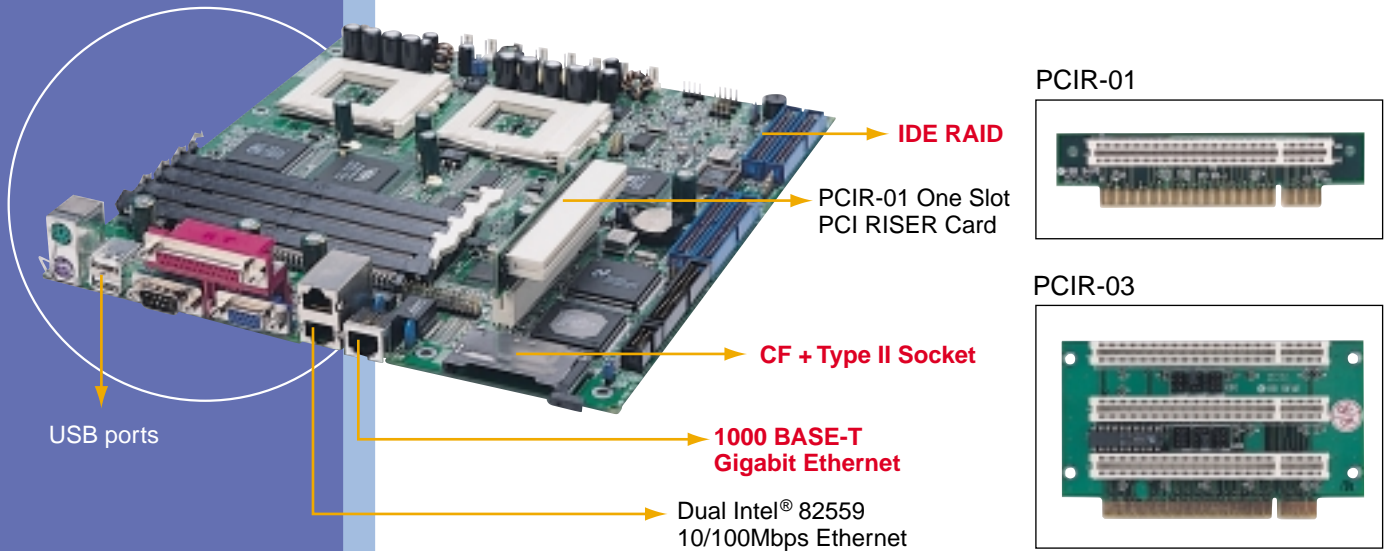

Dimensions

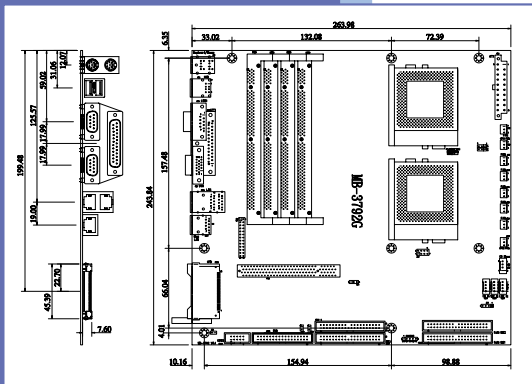

SPECIFICATIONS

- **CPU:** Dual Socket-370 Processor support Celeron™ (P-PGA)/ Pentium® III (FC-PGA) up to 133MHz FSB
- **BIOS:** Award PnP BIOS
- **System Chipset :** VIA VT82C694X/VT82C686B
- **System Memory :** Four 168-pin DIMM sockets up to 2GB SDRAM
- **Display :** SIS 6326 with 4MB V-RAM
- **Ethernet :** Dual Intel 82559 10/100Mbps LAN Chip and NS DP83820(83821)/83861 1000BASE-T Gigabit Ethernet (optional)
- **SSD:** CompactFlash Type II Socket for Compact Flash or IBM MicroDrive HDD.
- **Audio :** AC'97 compliant Audio CODEC
- **I/O :** – 2 x RS-232 serial port (16C550 UARTs compatible)
– 1 x parallel port (SPP/EPP/ECP)
– 2 x USB 1.1 (Pin header)
– 1 x IrDA (SIR)
– 1 x FDD port, support 1.44MB, 2.88MB, 3-mode function
– 2 x ATA-100 IDE channels
- **IDE RAID :** extra dual ATA-100 ports with RAID-0,1, 0/1 function
IDE RAID controller– PROMISE PDC-20267
- **One PCI Slot**
- **WDT:** software programmable, support 1~ 255 sec. system reset
- **Support ATX power control function**
- **Power Consumption :** +5V@10.5A,+12V@350mA, 3.3V@5.5A
(Dual PIII 1GHz and 2GB SDRAM)
- **Operating Temp. :** 0 - 60°C (CPU need cooler)
- **Relative Humidity:** 5~95%, non-condensing
- **GW:** 900g

What is 1000BASE-T Gigabit Ethernet Twisted-Pair Media System ?

The 1000BASE-T were developed in the 802.3ab supplement to the IEEE standard, which was formally adopted in July 1999. Supporting 1 billion bits per second over unshielded twisted-pair(UTP) cable is a remarkable achievement. **MB-3792G's** on board 1000BASE-T Ethernet port is fully compatible with your existing 10/100 network, providing scalable migration path from Ethernet and Fast Ethernet to Gigabit Ethernet performance.

The following media components are used to build a 1000BASE-T twisted-pair segment :

- Category 5 UTP cable.
- Eight-position RJ-45-style modular connectors that meet or exceed Category 5 specifications.

ORDERING INFORMATION

- **MB-3792G** Dual Socket-370 Processor ATX Main Board with 1000BASE-T Gigabit Ethernet
- **MB-3792** Dual Socket-370 Processor ATX Main Board
- **PCIR-01** One slot PCI Riser Card
- **PCIR-03** Three slots PCI Riser Card