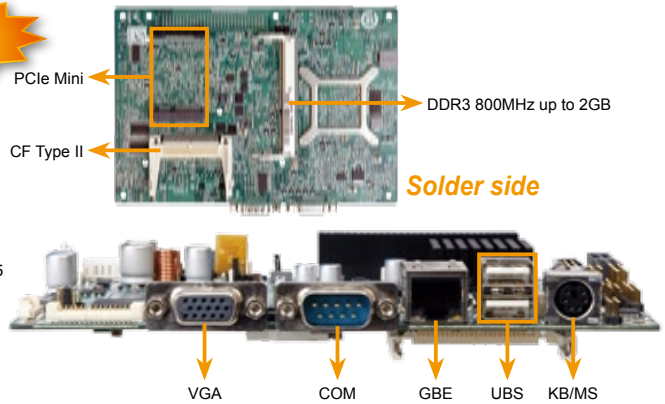

Dual LVDS Support


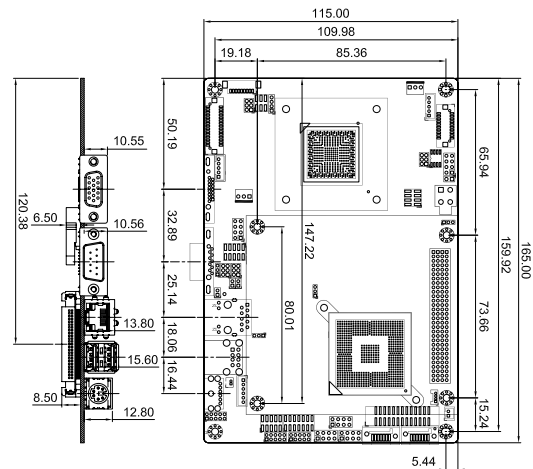
Specifications

- ◆ CPU
 - Intel® Atom™ D525 dual-core processor 1.8GHz/1MB L2 cache
 - Intel® Atom™ D425 single-core processor 1.8GHz/512KB L2 cache
 - Intel® Atom™ N455 single-core processor 1.66GHz/512KB L2 cache
- ◆ Chipset
 - Intel® ICH8M
- ◆ BIOS
 - UEFI BIOS
- ◆ Memory
 - One 204-pin 800MHz DDR3 SDRAM SO-DIMM supported (System max. 2GB)
- ◆ Graphic
 - GMA 3150
 - Graphic core speed 400MHz for D525/ D425
 - Graphic core speed 200MHz for N455
- ◆ Display Out
 - Analog CRT up to 2048x1536, support for CRT hot plug
 - 18-bit single-channel LVDS, resolution support up to 1366x768
 - 18/24-bit single/dual-channel LVDS by Novatek NT68667UFG resolution support up to 800x600, 1024x768, 1280x1024, 1366 x768, 1920x1080
- ◆ LAN
 - Realtek RTL8111E PCIe GbE controller with ASF2.0 support
- ◆ Super IO
 - Fintek F81865
- ◆ I/O Interface
 - 4 x RS-232 1 x RS232/422/485 (COM3) with Auto Flow control
 - 1 x LPT 2 x KB/MS
 - 1 x CF type II 2 x SATA II
 - 8 x USB 2.0
- ◆ Audio
 - Realtek ALC888 HD codec
- ◆ Expansion bus
 - 1 x PCI-104 slot
 - 1 x PCIe Mini card slot (PCIe + USB + SATA signal) support IEI mini DOM
- ◆ TPM (Optional)
 - INFINEON SLB9635TT1.2
- ◆ Watchdog Timer
 - Software programmable supports 1~255 sec. system reset by Super I/O
- ◆ Digital I/O
 - 8-bit digital I/O, 4-bit input / 4-bit output
- ◆ FAN Connector
 - 1 x 3-pin CPU fan
 - 1 x 3-pin system fan
- ◆ Power supply
 - 12V only, AT/ATX support
- ◆ Power Consumption
 - 12V@2.16A (Intel® Atom™ D525 1.8GHz with DDR3 1GB)
- ◆ Temperature Operation
 - 20°C ~ 60°C with free air, -20°C ~ 70°C with force air for D525 processor
 - 20°C ~ 65°C with free air, -20°C ~ 70°C with force air for D425 processor
 - 20°C ~ 70°C with free air, -20°C ~ 75°C with force air for N455 processor
- ◆ Humidity
 - Operation: 5% ~ 95% non-condensing
- ◆ Weight
 - GW: 650g / NW: 340g

Features

1. EPIC SBC with Intel® Atom™ D525 dual-core processor and DDR3 solution
2. 12V only Single Voltage design for AT/ATX mode
3. Support dual LVDS
4. Support PCI-104, PCIe Mini card slot
5. Support 5 x COM, 8 x USB, 2 x SATA II and CF type II socket
6. IEI One Key Recovery solution allows you to create rapid OS backup and recovery

Dimensions (mm)



Packing List

1 x NANO-PV-D4252/N4552/D5252 Single Board Computer	
2 x RS-232 cable (P/N: 19800-000049-RS)	
1 x SATA with 5V output cable (P/N: 32801000201-100-RS)	
1 x KB/MS Y cable (P/N: 32000-133200-RS)	
1 x Power cable (P/N: 32100-087100-RS)	1 x USB cable (P/N: 32000-044300-RS)
1 x Audio cable (P/N: 32000-072100-RS)	1 x Mini jumper pack
1 x QIG (Quick installation guide)	1 x Utility CD


Ordering Information

Part No.	Description
NANO-PV-D5252-R10	EPIC SBC with Intel® Atom™ D525 1.8GHz/1MB L2, VGA/Dual LVDS, PCIe GbE, CF type II, SATA II
NANO-PV-D4252-R10	EPIC SBC with Intel® Atom™ D425 1.8GHz/512KB L2, VGA/Dual LVDS, PCIe GbE, CF type II, SATA II
NANO-PV-N4552-R10	EPIC SBC with Intel® Atom™ N455 1.66GHz/512KB L2, VGA/Dual LVDS, PCIe GbE, CF type II, SATA II
32200-015100-RS	LPT cable
32000-062800-RS	SATA cable
32102-000100-100-RS	SATA Power cable
32102-000100-200-RS	
32102-000100-300-RS	
32205-000300-100-RS	RS-232/422/485 cable
19FTS00032100-000001-RS	CPU Fan

Intel® D525/D425/N455 Family

DDR3 Support for Low Power Embedded Platform

Intel® D525 Series DDR3 Block Diagram

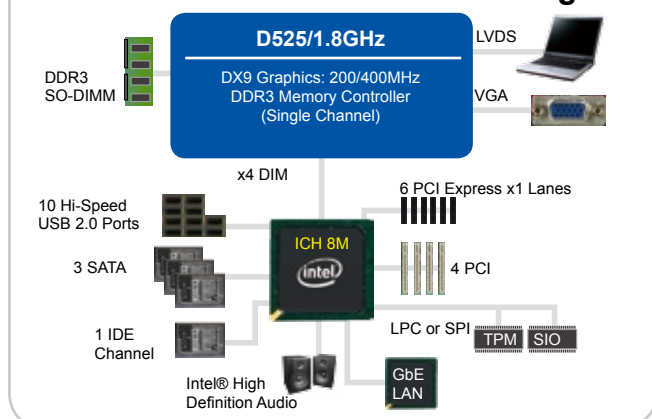

Next Generation Atom Platforms Feature

The GPU contains a refresh of the 3rd generation graphics core

- DirectX® 9 compliant Pixel Shader* v2.0
- 2 display ports: LVDS and RGB
 - Single LVDS channel supporting resolution up to 1366 * 768, 18bpp
 - Analog RGB display output resolution up to 2048 * 1536@ 60 Hz
- Intel® Clear Video Technology
- MPEG2 Hardware Acceleration


Embedded higher performance with DDR3 Sku

- Intel Atom D525 1.80GHz (Dual Core)
- Intel Atom D425 1.80GHz (Single Core)
- Intel Atom N455 1.66GHz (Single core)


Embedded Intel® Atom™ solution specification comparison table

Platform	Atom N270	Atom D510	Atom D425	Atom D525	Atom N455
CPU/Chipset	Atom N270 1.66GHz/ Intel 945GSE	Atom 1.66GHz Dual Core/D510	Atom 1.8GHz Single Core/D425	Atom 1.8GHz Dual Core/D525	Atom 1.66GHz Single Core/N455
L2 Cache	512KB	1024KB	512KB	1024KB	512KB
Supported Memory	DDR2 (400/533MHz) up to 2GB	DDR2 (533/667MHz) up to 2GB	DDR3 (800MHz) up to 4GB	DDR3 (800MHz) up to 4GB	DDR3 (667MHz) up to 2GB
Graphic Output	VGA, HDTV Dual-channel 18-bit LVDS, SDVO	VGA (2048x1536) Single-channel 18-bit LVDS	VGA (2048x1536) Single-channel 18-bit LVDS	VGA (2048x1536) Single-channel 18-bit LVDS	VGA (1400x1050) Single-channel 18-bit LVDS
Graphics Cores	Gen3.5, 133MHz DirectX9c, OpenGL 1.5 GMA 950	Gen 3.5, 400MHz DirectX9c, OpenGL 1.5 GMA 3150	Gen 3.5, 400MHz DirectX9c, OpenGL 1.5 GMA 3150	Gen 3.5, 400MHz DirectX9c, OpenGL 1.5 GMA 3150	Gen 3.5, 200MHz DirectX9c, OpenGL 1.5 GMA 3150
South Bridge	ICH7M	ICH8M	ICH8M	ICH8M	ICH8M
PCI-Express	4 Lanes, PCI Express 1.1 PCI Rev 2.3 @ 33MHz up to 4 bus masters	6 Lanes (1x4+ 2x1) PCI Express 1.1 PCI Rev 2.3 @ 33MHz up to 2 bus masters	6 Lanes (1x4+ 2x1), PCI Express 1.1		
PCI			PCI Rev 2.3 @ 33MHz up to 2 bus masters		
I/O	8 x USB 2.0 2 x SATA, 1 x IDE AC'97, HD Audio	10 x USB 2.0 3 x SATA II, 1 x IDE HD Audio	10 x USB 2.0 3 x SATA II, 1 x IDE HD Audio		
TDP	1.7W	2.4W	2.4W		

Intel® Dual Core™ Atom™ Performance Chart

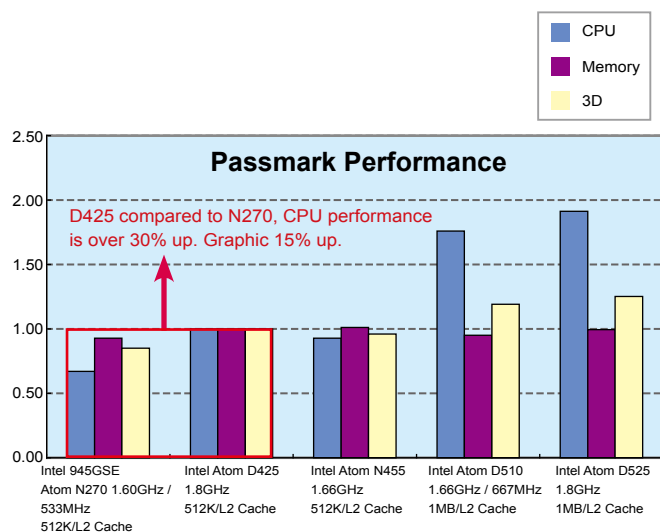

Power Consumption Comparison Chart

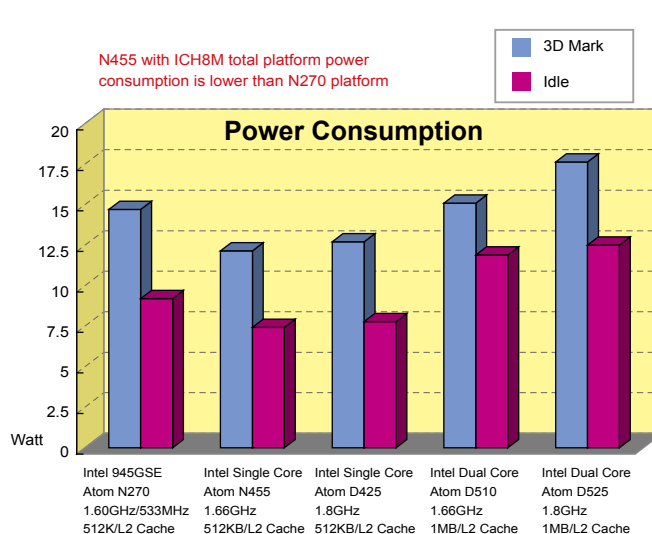




UEFI Introduction

- **UEFI (Unified Extensible Firmware Interface) BIOS** is next-generation BIOS firmware based on UEFI specifications and the Intel Platform Innovation Framework for EFI.
- UEFI BIOS can be expanded by using a variety of drivers, development tools, support utilities and pre-boot application (PBA) solutions.

UEFI Architecture

This figure shows a block diagram level architecture of framework design.

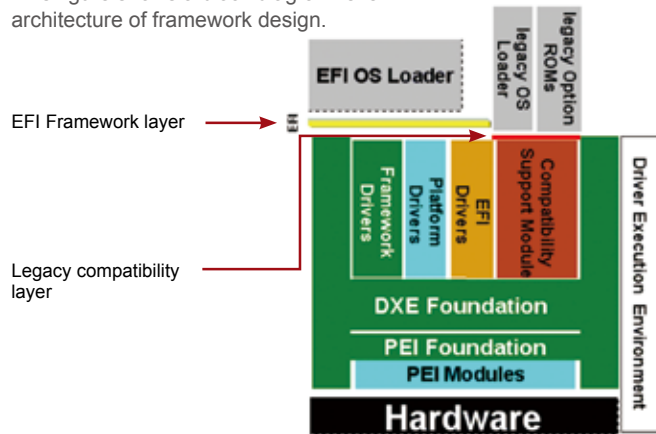

Legacy BIOS V.S. UEFI

	Legacy BIOS	UEFI
Language	Assembly	C (99%)
Resource	Interrupt Hardcode Memory Access Hardcode I/O Access	Driver \ Protocols
Processor	x86 16-bits	CPU Protected Mode (Flat Mode)
Target	Binary Code	Removable Binary Drivers
Expand	Hook Interrupt	Load Driver
OS Bridge	ACPI (SMI, INT Service)	RunTime Driver Service AED (ACPI EFI Protocol Driver) (ACPI, SMI)
3rd Party ISV & IHV	Bad for Support	Easy for Support and for Multi Platforms

The architecture represents a structured implementation composed primarily of the following:

- Foundation code that binds the pieces together
- Modular elements of code that perform the functional job of enumerating and initializing the platform

UEFI Benefits

Expansibility –

ODM/OEM and customers can add their own PBA easily. PBA can be integrated in BIOS flash or placed in external mass storage devices.

Migration ability –

Drivers, PBA can be migrated easily from one platform to another because they're designed highly modularize on a unified framework.

iEi Products with UEFI BIOS

1.QM57/HM55 chipset family.

KINO-QM57A, KINO-HM551, AFLMB2-QM57, AFLMB2-HM55, NOVA-HM551, NANO-QM57A, NANO-HM551

2.G41 chipset family

IMBA-G410, IMBA-G412ISA, KINO-G410

3. D525/D425/ N455 family

iEi UEFI BIOS Features

1. Familiarity –

Providing advanced UEFI functionality with a familiar BIOS setup interface.

2. Compatibility –

Designed to extend BIOS compatibility into UEFI solutions. Supporting legacy Option Rom binaries and operating systems requiring a legacy BIOS runtime interface.



3. Functionality –

- (1) Compliant with iSMM H/W monitor utility
- (2) Dynamic LOGO
- (3) Fast boot
- (4) ICP Standard Feature – AT/ATX, WDT, DIO
- (5) BIOS setup with touch device support
- (6) HDD/Storage support over 2.2TB with 64-bit operation system

4. Extensibility –

- Allowing to add and execute pre-boot applications (PBA) in a protected hidden partition
- (1) HDD Security
 - (2) Shell environment
 - (3) Pre-boot messenger (Third Party)
 - (4) Pre-boot Network Browser (Third Party)
 - (5) Pre-boot Antivirus (Third Party)

IEI One Key Recovery Solution

IEI unique one key recovery solution includes exclusive technology to recover and backup your operating system by just one click without any complicated settings. IEI freely bundled recovery CD is shipped with every IEI SBC, embedded system and all-in-one panel PC products.




Recovery Tool for IEI Products Only

The IEI recovery CD includes a system recovery software developed by IEI with the Windows PE 2.0. The recovery CD helps to create full system backup and restore from system failures. Users don't need to spend additional cost for other system backup and recovery tools.

System Recovery




System Backup

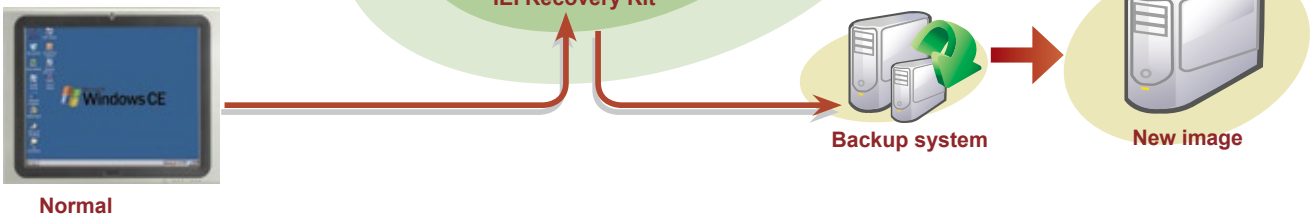

Recovery Partition

Hidden partition is a logical section of a disk which is not accessible to the operating system. You can use a partition tool such as SPFDISK to create a hidden partition first. It may be used to protect confidential data or store backup of the system.

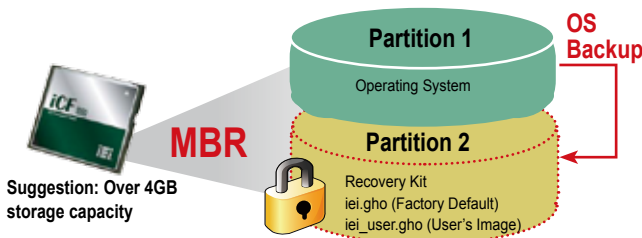

Suggestion: Over 4GB storage capacity

IEI Recovery Solution Advantages:


- No need to make recovery discs by yourself nor follow the trivial imaging procedures
- Simple steps to backup or restore the system. No IT personnel are required.
- Backup/Restore system easily through unique multi-menu
- One key to make recovery disc
- One key to restore system

IEI Products Only



IEI Certified Sticker

The IEI recovery CD is only for IEI products. A message will show to warn "you are an illegal user" if using the CD for non-IEI products. This protection is detected through the BIOS of the IEI boards.

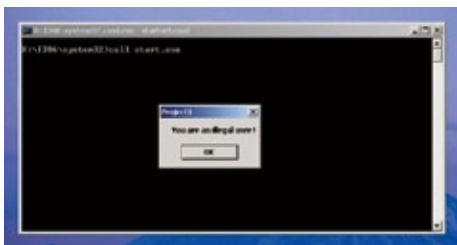

Support OS List

Windows® XP	Windows® Vista
Windows® 7	Windows® CE 5.0
Windows® CE 6.0	Windows® XP Embedded
Linux OS	
1.Red Hat RHEL- 5.4	
2.Fedora Core 7, 8, 10, 11, 12	
3.Ubuntu 6.10, 7.10, 8.10	
4.Debien 4.0, 5.0	
5. SuSe 11.2	

Rapid Imaging/ Migration through One Touch Hot Key



Neither specialized IT staff nor consultants are required in order to implement the system imaging and data migration. Just press the F3 key to get access to the recovery menu. The one key operation simplifies the imaging or migration process to help IT staff up and running quickly.

EASY WAY



One-Key Recovery

- Factory restore: restore your system to default setting (iei.gho)
- Restore your last backup: recover the last system configuration (iei_user.gho)




```
1. Factory Restore
2. Backup system
3. Restore your last backup.
4. Manual
5. Quit
Please type the number to select and then press Enter: _
```



One-Key Backup

Backup your operating system to the secure hidden partition. You can create your own ghost image as "iei_user.gho" including your application programs set-ups.

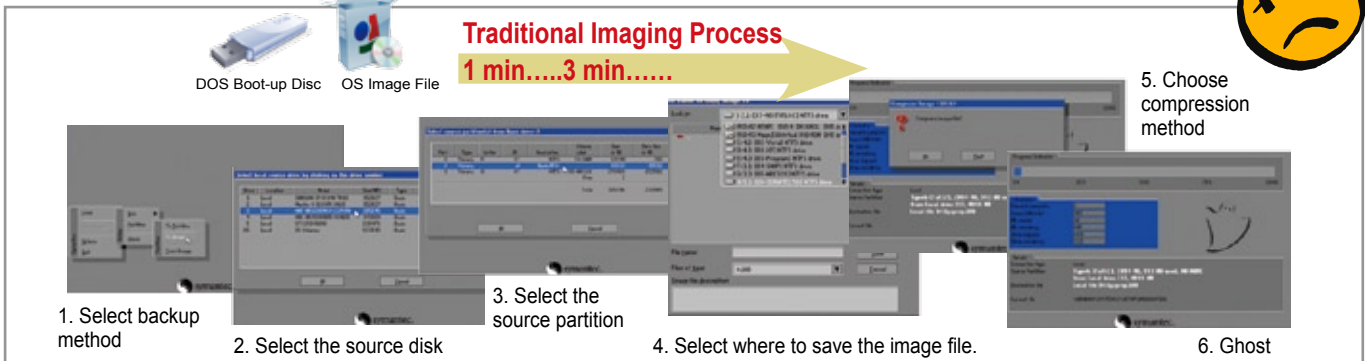

Benefits

Remote Maintenance Reduces the Cost of IT Infrastructure

All migration tasks can be performed remotely from a central management console. It will save a lot of cost from reducing physical visits.


2 Use the recovery tool to restore your OS at the local site

Alert

1 When the system is infected by virus or has a blue screen.



One Key Restore + Remote KVM



3

Remote Troubleshooting



IEI Intelligent System Management Module

What is the IEI Intelligent System Management Module (iSMM) ?

iSMM

IEI iSMM is a system health supervision API which utilizes sensor chips on IEI motherboards to track system and CPU temperatures, voltages, cooling fan speed., WDT and Digital I/O set up status. By quickly capturing and reporting system health data, users can prevent disasters such as system instability or damage.

Features

- External and on-chip voltages data feedback
- CPU and system temperature data feedback
- Cooling fan speed data feedback
- Cooling fan speed controlled by PWM/ On-Off/ Automatic Mode
- Warning signals by beeper and sound effect
- WDT Test
- Programmable Digital I/O
- System health configurations save and load

Available Models

iSMM support below super I/O:

- Winbond W83627
- ITE IT8712
- ITE IT8718
- Fintek F81216D
- Fintek F81865

Available Operation System


- Windows XP
- Windows Vista
- Windows 7

Note: Please disable UAC function before install iSMM software under Windows Vista and Windows 7.

Advantages

**Know that your system is running within safe limits !!
Prevent disasters such as system instability or damage.**

Architecture

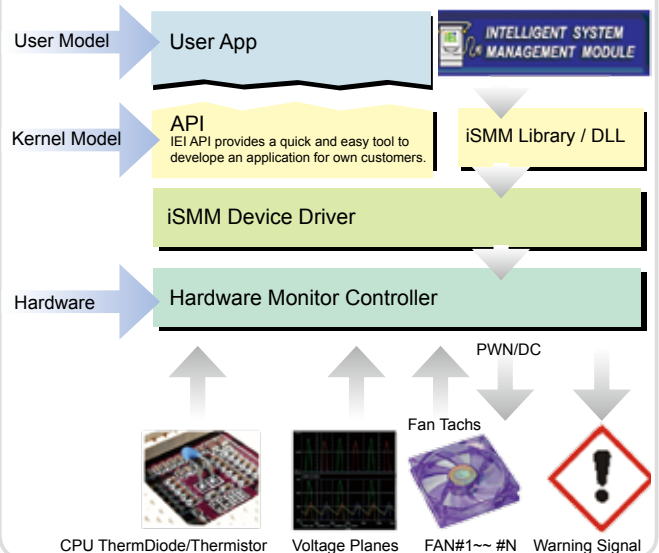

IEI Exclusive Diagnosis Software

Full Graphic Interface,
Real-time, 6 in 1 Modules !!



IEI Solutions
Compliance Only

Functions

Temp. CPU + System temperature monitoring	Fan Dynamic fan speed controlling	Voltage. Real time voltage alarm	DIO Easy Digital I/O configuration	WDT Trouble free watch dog timer testing	Save/Load Flexibility user profile recover	Cash drawer Cash drawer status monitoring